

DRIVING POINT IMPEDANCE OF LINEAR
ANTENNAS IN THE PRESENCE OF A
STRATIFIED DIELECTRIC

By

Janis Galejs

APPLIED RESEARCH LABORATORY
SYLVANIA ELECTRONIC SYSTEMS
A Division of Sylvania Electric Products Inc.
40 SYLVAN ROAD, WALTHAM, MASSACHUSETTS 02154

Contract No. AF19(628)-2410

Project No. 4642

Task No. 464202

Scientific Report No. 7


April 1965

35-P
200
0.50

Prepared for

Air Force Cambridge Research Laboratories
Office of Aerospace Research
United States Air Force
Bedford, Massachusetts

ARCHIVE COPY

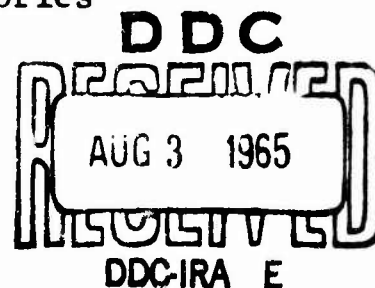

Requests for additional copies by agencies of the Department of Defense, their contractors, or other government agencies should be directed to:

DEFENSE DOCUMENTATION CENTER (DDC)
CAMERON STATION
ALEXANDRIA, VIRGINIA 22314

Department of Defense contractors must be established for DDC services or have their "need-to-know" certified by the cognizant military agency of their project or contract.

All other persons and organizations should apply to the:

Clearinghouse for Federal Scientific
and Technical Information (CFSTI)
Sills Building
5285 Port Royal Road
Springfield, Virginia 22151

AFCRL-65-372

DRIVING POINT IMPEDANCE OF LINEAR
ANTENNAS IN THE PRESENCE OF A
STRATIFIED DIELECTRIC

By

Janis Galejs

APPLIED RESEARCH LABORATORY
SYLVANIA ELECTRONIC SYSTEMS
A Division of Sylvania Electric Products Inc.
40 SYLVAN ROAD, WALTHAM, MASSACHUSETTS 02154

Contract No. AF19(628)-2410

Project No. 4642

Task No. 464202

Scientific Report No. 7

April 1965

Prepared for

Air Force Cambridge Research Laboratories
Office of Aerospace Research
United States Air Force
Bedford, Massachusetts

DRIVING POINT IMPEDANCE OF LINEAR ANTENNAS IN THE
PRESENCE OF A STRATIFIED DIELECTRIC

by

Janis Galejs

Applied Research Laboratory
Sylvania Electronic Systems
A Division of Sylvania Electric Products, Inc.
Waltham, Massachusetts 02154

ABSTRACT

A linear flat strip antenna lies between several dielectric layers in a direction parallel to the interfaces. Its impedance is formulated variationally as an infinite double integral. For thin half-wave antennas in a homogeneous medium the double integral is evaluated analytically and it gives standard impedance expressions. For antennas of finite width the integrals are evaluated numerically and for a homogeneous medium the impedance has been correlated with the theories of King and Middleton, Wu, with the impedance computed from a complementary slot antenna and with available measurements. The impedance is also computed for antennas in a dielectric layer, and the decrease of the radiation efficiency observed with increasing electrical thickness of the layer is explained with the increased amounts of surface wave power and in part by local dielectric losses. For insulated antennas located in a dissipative medium the theory presented here yields results in better agreement with measurements than the conventional transmission line theory. The transmission line theory is shown to give too large a resistance and reactance at the full-wave resonant peaks of the impedance and too low a resistance for short antennas.

1. INTRODUCTION

Numerous investigations have been reported of the input impedance of linear antennas in homogeneous lossy media [King, 1956; King and Harrison, 1960; King and Iizuka, 1963]. Treatments of insulated antennas in a highly dissipative medium have been based on transmission line theory [Moore, 1951, Ghose, 1960, Guy and Hasserjian, 1963]. The theory of insulated antennas in an infinite dissipative medium has been further refined by King [1964] but there are at present no impedance calculations for linear antennas in the presence of stratified media of arbitrary parameters. This may be due in part to the difficulty of treating the cylindrical boundary of the antenna and its insulation simultaneously with the planar boundary of the dielectric layers.

Slot antenna impedance for plasma and dielectric layers have been considered by Galejs [1964, 1965a,b] and by Villeneuve [1965] and the impedance of an insulated loop in a dissipative medium has been calculated by Galejs [1965c]. A similar variational impedance formulation is derived herein for linear antennas surrounded by a stratified dielectric. The linear antenna is assumed to be in the shape of a rectangular strip of zero thickness that is excited at its center and is sandwiched between parallel dielectric layers as shown in Fig. 1. The dielectric regions are surrounded by free space, but the layers may be unsymmetrical with respect to the antenna. For semi-infinite media one of the boundaries between the dielectric and the free space can be made to recede to infinity.

For dielectric layers that may be lossy or that can support surface waves the power radiated into the two lossless half-space regions will generally differ from the power supplied to the antenna. Hence, separate expressions are derived for the input impedance of the antenna and for its radiation resistance. The integrals of the resulting expressions are evaluated in closed form for antennas in a homogeneous medium. The well known results for a thin half wave antenna in free space or in a homogeneous dielectric provides a simple check of the development, as is shown in section 3.1. In section 3.2 the present formulation is compared with available theories for homogeneous media. Calculations for an insulated strip antenna in a dielectric layer are reported in Section 3.3. Section 3.4 considers the insulated antenna in a dissipative medium. Comparisons are made with the conventional transmission line theory and several measurements.

2.0 ANTENNA DRIVING POINT IMPEDANCE AND RADIATION RESISTANCE

The driving point impedance of a flat strip antenna may be computed from the expression

$$Z = - \frac{\iint \underline{E} \cdot \underline{J}_s \, dx \, dy}{[I(x=0)]^2} \quad (1)$$

which is stationary with respect to small changes of the surface current density \underline{J}_s or of the current $I(x,y)$ about its correct value (Harrington [1961], Section 7-9). The surface current \underline{J}_s is assumed to have only an x-component J_x , which in addition, is an even function about $x=0, y=0$. The antenna fields can be expressed as a superposition of TE and TM modes and it follows from the Appendix that

$$Z = \frac{i\omega\mu_0}{[2\pi I(x=0)]^2} \int_{-\infty}^{\infty} \int_{-\infty}^{\infty} F(u,v) \left[\iint J_x(x,y) \cos ux \cos vy \, dx \, dy \right]^2 du \, dv \quad (2)$$

where

$$F(u,v) = \frac{v^2}{u^2+v^2} \left[\gamma_{op} \frac{1-R_{aop}}{1+R_{aop}} + \gamma_{iq} \frac{1-R_{aiq}}{1+R_{aiq}} \right]^{-1} - \frac{u^2}{u^2+v^2} \left[\frac{k_{op}^2}{\gamma_{op}} \frac{1+R_{bop}}{1-R_{bop}} + \frac{k_{iq}^2}{\gamma_{iq}} \frac{1+R_{biq}}{1-R_{biq}} \right]^{-1}. \quad (3)$$

The designation of the dielectric layers by subscripts is seen from Fig. 1 and in particular the subscripts op and iq designate dielectric layers next to $z=0$ for $z \geq 0$ and $z \leq 0$ respectively. The other symbols are defined as $k_{jl} = \sqrt{\omega^2 \mu_0 \epsilon_{jl} + i\omega \mu_0 \sigma_{jl}}$, $\gamma_{jl} = \sqrt{k_{jl}^2 - u^2 - v^2}$, where $j=0$ or 1 and $l = 1, 2, \dots, p$ or $1, 2, \dots, q$. The reflection coefficients of the TE modes R_{ajl} and of the TM modes R_{bjl} depend on the dielectric structure for $|z| > 0$. For stratified dielectric layers as shown in Figure 1 the reflection coefficient R_{djl} ($d=a$ or b) in the region of $|z_{l+1}| \leq |z| \leq |z_l|$ is related to the reflection coefficient $R_{d(l-1)}$ of the region $|z_l| \leq |z| \leq |z_{l-1}|$ by the expressions

$$R_{ajl} = e^{2\gamma_l |z_l|} \frac{\left[e^{2\gamma_{l-1} |z_l|} + R_{a(l-1)} \right] - \frac{\gamma_{l-1}}{\gamma_l} \left[e^{2\gamma_{l-1} |z_l|} - R_{a(l-1)} \right]}{\left[e^{2\gamma_{l-1} |z_l|} + R_{a(l-1)} \right] + \frac{\gamma_{l-1}}{\gamma_l} \left[e^{2\gamma_{l-1} |z_l|} - R_{a(l-1)} \right]} \quad (4)$$

$$R_{bjl} = e^{2\gamma_l |z_l|} \frac{\left(\frac{k_{l-1}}{k_l} \right)^2 \left[e^{2\gamma_{l-1} |z_l|} + R_{b(l-1)} \right] - \frac{\gamma_{l-1}}{\gamma_l} \left[e^{2\gamma_{l-1} |z_l|} - R_{b(l-1)} \right]}{\left(\frac{k_{l-1}}{k_l} \right)^2 \left[e^{2\gamma_{l-1} |z_l|} + R_{b(l-1)} \right] + \frac{\gamma_{l-1}}{\gamma_l} \left[e^{2\gamma_{l-1} |z_l|} - R_{b(l-1)} \right]} \quad (5)$$

where the subscript "j" has been omitted in the right hand sides of (4) and (5). $R_{dj\ell}$ is derived by considering the scalar functions (40) to (43) in two adjacent layers and by requiring the tangential field components (44), (45), (47) and (48) to be continuous across the interface. The computations should start with $\ell=1$ where $R_{dj(\ell-1)} = R_{djo} = 0$ in (4) and (5). A series of computations gives then R_{dj1} , R_{dj2} , R_{dj3} and finally R_{djp} or R_{djq} in (3).

The antenna current density is assumed to be representable by [Galejs 1963, 1965] the trial function

$$J_x(x, y) = [A \sin[k(\ell - |x|)] + B(1 - \cos[k(\ell - |x|)])]f(y) \quad (6)$$

with $f(y) = 1/(2a) = \text{const.}$ Substituting (6) in (2) and utilizing the stationary character of the impedance expression for determining the complex amplitudes A and B, it follows that [Galejs 1963, 1965]

$$\frac{A}{B} = \frac{\gamma_{BB} F_A - \gamma_{AB} F_B}{\gamma_{AA} F_B - \gamma_{AB} F_A} \quad (7)$$

$$Z = \frac{\gamma_{AA} \gamma_{BB} - \gamma_{AB}^2}{\Delta} \quad (8)$$

with

$$\Delta = F_B^2 \gamma_{AA} - 2F_A F_B \gamma_{AB} + F_A^2 \gamma_{BB} \quad (9)$$

$$F_A = \sin kl \quad (10)$$

$$F_B = 1 - \cos kl \quad (11)$$

$$\gamma_{NM} = \frac{4k^2 \epsilon \mu_0}{\pi^2} \int_0^\infty dv \left(\frac{\sin \epsilon v}{\epsilon v} \right)^2 \int_0^\infty du F(u, v) g_N(u) g_M(u) \quad (12)$$

$$g_A(u) = \frac{1}{k^2 - u^2} (\cos ul - \cos kl) \quad (13)$$

$$g_B(u) = \frac{1}{k^2 - u^2} \left(\frac{k}{u} \sin ul - \sin kl \right) \quad (14)$$

The impedance can be also computed for the sinusoidal field distribution term by setting $B = 0$ in (6). This gives

$$Z_s = \frac{\gamma_{AA}}{F_A^2} \quad (15)$$

The power radiated into the region outside of the dielectric slabs can be computed as

$$P_r = \text{Re} \iint \underline{E} \times \underline{H}^* \cdot d\underline{s} \quad (16)$$

where the integration is carried out over the outermost surfaces of the dielectric ($z = z_{01}$ and z_{11}) and where ds is in the direction of the outward normal. After substituting the field expressions of the Appendix, (16) becomes a six fold integral. The x and y integrals are carried out first and they give delta functions. The two subsequent integrations are trivial and the remaining double integral becomes

$$P_r = \frac{16\pi^2}{\omega\mu_0} \int_0^{k_0} du \int_0^{\sqrt{k_0^2 - u^2}} dv \sqrt{k_0^2 - u^2 - v^2} (u^2 + v^2) \cdot \left[|A_{\infty}|^2 + |A_{10}|^2 + k_0^2 |B_{00}|^2 + k_0^2 |B_{10}|^2 \right] \quad (17)$$

where A_{j0} and B_{j0} designate the complex amplitudes of TE and TM modes for $z > z_{01}$ (when $j=0$) and for $z < z_{11}$ (when $j=1$). The amplitudes A_{j0} and B_{j0} are related to the corresponding amplitudes in the dielectric region near the antenna A_{js} and B_{js} ($s=p$ for $j=0$, $s=q$ for $j=1$) by matching the tangential field components across the dielectric interfaces. This gives

$$A_{j0} = \left[\prod_{l=1}^s \frac{e^{\gamma_{jl}|z_{jl}|} + R_{ajl} e^{-\gamma_{jl}|z_{jl}|}}{e^{\gamma_{j(l-1)}|z_{jl}|} + R_{aj(l-1)} e^{-\gamma_{j(l-1)}|z_{jl}|}} \right] A_{js} \quad (18)$$

$$B_{j0} = \left[\prod_{l=1}^s \frac{e^{\gamma_{jl}|z_{jl}|} - R_{bjl} e^{-\gamma_{jl}|z_{jl}|}}{e^{\gamma_{j(l-1)}|z_{jl}|} - R_{bj(l-1)} e^{-\gamma_{j(l-1)}|z_{jl}|}} \right] \frac{\gamma_{js}}{\gamma_{j0}} B_{js} \quad (19)$$

where $R_{aj0} = R_{bj0} = 0$ and where $\Pi = 1$ in absence of dielectric layers ($s=0$). A_{js} and B_{js} are related to the amplitudes A and B of the trial function for the antenna current density (6) by

$$A_{js} = \frac{v}{1+R_{ajs}} \left[\gamma_{op} \frac{1-R_{aop}}{1+R_{aop}} + \gamma_{1q} \frac{1-R_{a1q}}{1+R_{a1q}} \right]^{-1} H(u,v) \quad (20)$$

$$\gamma_{js} B_{js} = \mp \frac{u}{1-R_{bjs}} \left[\frac{k_{op}^2}{\gamma_{op}} \frac{1+R_{bop}}{1-R_{bop}} + \frac{k_{1q}^2}{\gamma_{1q}} \frac{1+R_{b1q}}{1-R_{b1q}} \right]^{-1} H(u,v) \quad (21)$$

with

$$H(u,v) = \frac{\omega\mu_0}{u^2+v^2} \left(\frac{1}{2\pi} \right)^2 \frac{\sin v\epsilon}{v\epsilon} 2k \left[A g_A(u) + B g_B(u) \right]. \quad (22)$$

The minus sign of (21) should be used with $j=0$ and $s=p$, the plus sign with $j=1$ and $s=q$. With P_r of (16) related to A and B by (17) to (22), the radiation resistance R_r may be defined as

$$R_r = \frac{P_r}{|I(x=0)|^2} = \frac{P_r}{|AF_A + BF_B|^2} \quad (23)$$

where the complex ratio A/B is given by (7).

With no losses present in the dielectric layers the power carried by surface waves that are guided along the dielectric interfaces can be computed as

$$P_s = \text{Re} \iint \underline{E} \times \underline{H}^* \cdot d\underline{s} \quad (24)$$

where the integration is carried out over the surfaces $x = \pm \infty$ and $y = \pm \infty$ and where \underline{s} is in the direction of the outward normal. Considering an antenna located at the center of a single lossless dielectric layer ($p=q=1$) of thickness $2a = z_{01} - z_{11}$, the integrals representing the fields in (24) are singular for those values $\lambda^2 = u^2 + v^2$, where $R_{a01} = R_{a11} = 1$ or $R_{b01} = R_{b11} = -1$. This gives

$$\tan \left(ak_0 \sqrt{\epsilon_r - w^2} \right) = \frac{\sqrt{w^2 - 1}}{\sqrt{\epsilon_r - w^2}} \quad (25)$$

and

$$\tan \left(ak_0 \sqrt{\epsilon_r - w^2} \right) = - \frac{\sqrt{\epsilon_r - w^2}}{\epsilon_r \sqrt{w^2 - 1}} \quad (26)$$

with $1 < (w\lambda/k_0) < \sqrt{\epsilon_r}$ and $\epsilon_r = \epsilon_{01}/\epsilon_0 = \epsilon_{11}/\epsilon_0$ as the equations for determining the characteristic values λ for TE and TM modes respectively. Equation (25) has real solutions for the TE modes for any thickness of the dielectric layer. Equation (26) has real solutions for the TM modes only for $ak_0 \sqrt{\epsilon_r - 1} > \pi/2$. For lossless dielectric there are no complex solutions which satisfy the radiation condition following Whitmer [1948].

Substituting the field expressions of the Appendix, (24) becomes a six-fold integral. In the integrals over the $x = \pm \infty$ ($y = \pm \infty$) surfaces the y (x) integrals give delta functions, which makes one of the v (u) integrals trivial. The two u (v) integrals are computed by evaluating the residues at the poles given by (25) and (26). The z integrations are trivial and (24) is reduced to

$$P_s = P_s|_{TE} + P_s|_{TM} \quad (27)$$

where

$$P_s|_{TE} = \frac{\omega \mu_0}{8\pi} \left[\frac{\gamma_{00}}{\lambda(1-a\gamma_{00})} \right]^2 \left\{ a \left[1 + \frac{\sin(-2i\gamma_{01}a)}{(-2i\gamma_{01}a)} \right] - \frac{\cos^2(-i\gamma_{01}a)}{\gamma_{00}} \right\} \quad (28)$$

$$\cdot (I_{x1} + I_{y1})$$

$$P_s|_{TM} = \frac{\omega \mu_0}{8\pi} \left[\frac{\gamma_{01}^2}{k_{01}\lambda} \right]^2 \left[\epsilon_r \frac{\gamma_{00}^2 - \gamma_{01}^2}{(\epsilon_r \gamma_{00})^2 - \gamma_{01}^2} + a \gamma_{00} \right]^{-2} \quad (29)$$

$$\cdot \left\{ a \left[1 - \frac{\sin(-2i\gamma_{01}a)}{(-2i\gamma_{01}a)} \right] + \frac{\gamma_{01}^2}{\gamma_{00}^3} \sin^2(-i\gamma_{01}a) \right\} (I_{x2} + I_{y2})$$

$$I_{x1} = \int_{v=0}^{\lambda} \frac{dv v^2}{\sqrt{\lambda^2 - v^2}} \left| g(\sqrt{\lambda^2 - v^2}) h(v) \right|^2 \quad (30)$$

$$I_{y1} = \int_{u=0}^{\lambda} du \sqrt{\lambda^2 - u^2} \left| g(u) h(\sqrt{\lambda^2 - u^2}) \right|^2 \quad (31)$$

$$I_{x2} = \int_{v=0}^{\lambda} dv \sqrt{\lambda^2 - v^2} \left| g(\sqrt{\lambda^2 - v^2}) h(v) \right|^2 \quad (32)$$

$$I_{y2} = \int_{u=0}^{\lambda} \frac{du u^2}{\sqrt{\lambda^2 - u^2}} \left| g(u) h(\sqrt{\lambda^2 - u^2}) \right|^2 \quad (33)$$

$$g(u) = 2k \left[A g_A(u) + B g_B(u) \right] \quad (34)$$

$h(v) = \sin \epsilon v / \epsilon v$, $g_A(u)$ and $g_B(u)$ are defined by (13) and (14), γ_{00} is negative and γ_{01} is purely imaginary. The antenna input resistance R_s associated with the surface wave power is computed from (27) by analogy with (23).

3.0 NUMERICAL CALCULATIONS

3.1 The Free Space Impedance of a Thin Antenna

The antenna impedance (8) or (15) is expressed in terms of double integrals (12), which can be evaluated analytically for the antenna in a homogeneous medium. The free space impedance (15) of a thin half-wavelength antenna will be considered as a simple example. For $l = \lambda/4 = \pi/(2k_0)$, k of the trial functions (6) set equal to $k_0 = \omega \sqrt{\mu_0 \epsilon_0}$, and with $R_{djl} = 0$ γ_{AA} of (12) simplifies to

$$\gamma_{AA} = \frac{2\mu_0}{\pi^2} \int_0^\infty dv \left(\frac{\sin ev}{ev} \right)^2 \int_0^\infty \frac{du \cos^2\left(\frac{\pi u}{2k}\right)}{\sqrt{k^2 - u^2 - v^2}(k^2 - u^2)}. \quad (35)$$

With $F_A = 1$, substitution of (35) in (15) gives the real part of the impedance as

$$\begin{aligned} \text{Re } Z_s &= \frac{2\mu_0}{\pi^2} \int_0^k \frac{du \cos^2\left(\frac{\pi u}{2k}\right)}{k^2 - u^2} \int_0^{\sqrt{k^2 - u^2}} \frac{dv}{\sqrt{k^2 - u^2 - v^2}} \\ &= \frac{\mu_0}{\pi} \int_0^k \frac{du \cos^2\left(\frac{\pi u}{2k}\right)}{(k-u)(k+u)}. \end{aligned} \quad (36)$$

After expanding the denominator in partial fractions and changing the variables of integration to $(k-u)$ and $(k+u)$

$$\begin{aligned} \text{Re } Z_s &= 60 \int_0^2 \frac{\sin^2\left(\frac{\pi x}{2}\right)}{x} dx = 30 [\log(2\pi) + 0.5772 - \text{Ci}(2\pi)] \\ &= 73.1 \end{aligned} \quad (37)$$

where $\text{Ci}(x)$ is the cosine integral. The imaginary part of the impedance is obtained as

$$\text{Im } Z_s = -\frac{2\mu_0}{\pi^2} \left[\int_0^k du \int_{\sqrt{k^2 - u^2}}^\infty dv + \int_k^\infty du \int_0^\infty dv \right] \quad (38)$$

$$\cdot \left[\frac{\cos^2\left(\frac{\pi u}{2k}\right)}{k^2 - u^2} \left(\frac{\sin ev}{ev} \right)^2 \frac{1}{\sqrt{v^2 + u^2 - k^2}} \right]. \quad (38)$$

The v -integrations become elementary by noting that $(\sin ev/ev) \approx 1$ over the range of v where $\sqrt{v^2 + u^2 - k^2} \neq v$. (This applies strictly if $\epsilon \rightarrow 0$ and $u \leq u_0 = \text{finite}$.) It follows that

$$\begin{aligned} \text{Im } Z_s &= \frac{a\mu_0}{\pi k^2} \int_0^\infty \frac{du \cos^2\left(\frac{\pi u}{2k}\right)}{1 - \left(\frac{u}{k}\right)^2} \left[\log\left|1 - \frac{u}{k}\right| + \log\left(1 + \frac{u}{k}\right) \right] \\ &= \frac{240}{\pi} \int_0^\infty \frac{dy \log y \sin^2 \pi y}{4-y^2} = -30 \text{ Si}(2\pi) = -42.5 \end{aligned} \quad (39)$$

where $\text{Si}(x)$ is the sine integral. The numerical values (37) and (39) are recognized as standard results [Kraus, 1950, Sec. 10.3].

Considering the previous example of free space and a thin half-wavelength antenna, the radiation resistance R_r (23) simplifies under similar assumptions to $\text{Re } Z_s$ of (36) and (37).

3.2 Antennas in a Homogeneous Dielectric

Impedance calculations for an antenna of a finite width are first carried out for homogeneous media where other solutions are already available.

The free space impedance of a $\lambda/2$ antenna is shown in Figure 2 for various values of the width ϵ or of the parameter $\Omega = 2\ln(4l/\epsilon)$. Also shown in Figure 2 are the impedance of a cylindrical antenna of radius $a = \epsilon/2$ (Table II.30.1 of King [1956]), and the impedance Z computed from the admittance Y of a complementary slot antenna [Galejs, 1964] using the formula $Z = \mu_0 Y / [2\epsilon(1+i \tan \delta)]$. The assumption of a sinusoidal current distribution is shown to give an incorrect resistance for antennas of finite width. For $\Omega < 10$ the reactance computed by King [1956], is nearly the same as for the assumed sinusoidal current distribution and it differs from the other computations. There is good agreement between the various computations for antennas of $\Omega > 11$.

The admittance of the strip antenna in a lossy medium is compared in Figure 3 with the admittance of a complementary slot antenna [Galejs, 1964], with measurements of Iizuka and King [Fig. 10, 1962] and with the theory of Wu [1961, Gooch, et al 1963]. The antenna admittance calculated from King [1956] for a lossless dielectric is also indicated in Figure 3. The antenna length is equal to one-half wave length for low dielectric losses and $\epsilon_r = \epsilon_d/\epsilon_0$ changes from 78 to 69 with increasing losses as indicated by Iizuka and King [1962]. There is good agreement between the various theoretical curves for $\tan \delta_d < 2$. The measured conductance appears too low for a low loss dielectric. The theory of Wu gives lower susceptance figures for high loss tangents. The admittance of the complementary slot has been computed

using a complex value of $k=k_0 \sqrt{\epsilon_d/\epsilon_0} \sqrt{1+i \tan \delta_d}$ in the trial functions (6), while the admittance of the strip antenna was computed using real values of $k=k_0 \sqrt{\epsilon_d/\epsilon_0}$. This may account for some of the differences between the two sets of calculations for larger values of $\tan \delta_d$.

3.3 Antenna in Dielectric Layers

The impedance of a linear antenna located either in the center or on the surface of dielectric layers of various thicknesses $2d$ is shown in Figures 4-9 along with the corresponding efficiency figures. All the calculations of these figures are made for antennas of $\Omega = 8$ and the heavy horizontal lines indicated on the sides of the figures denote the impedance for $d=0$ or ∞ computed from a complementary slot antenna. The radiation efficiency is computed as a ratio between the power radiated normally through the dielectric surface as indicated in (16) and the power supplied to the antenna. The surface wave efficiency denotes the ratio between the total power carried by the surface wave for a lossless dielectric in the direction parallel to the dielectric surface and the power supplied to the antenna. For a lossy dielectric that part of surface wave power which flows outside of the dielectric layer will be eventually dissipated inside the dielectric and this power will not appear as part of the power radiated outside the lossy dielectric in (16). The sum of the surface wave efficiency and the radiating efficiency are a little less than unity for a low loss dielectric ($\tan \delta_d = 0.03$) in figures 4 and 5, and appreciably less than unity for higher dielectric losses ($\tan \delta_d = 0.1$ and 1) in figure 6, when significant dissipation occurs in immediate vicinity antenna. For antennas located in the center of the dielectric layer the radiation efficiency is decreased by increasing the dielectric constant of the layer (figure 5), but it is unchanged for the several antenna lengths shown in figure 4.

For antennas located on the surface of the dielectric layer (figures 7 and 8) the radiation efficiency is practically unaffected by changes of the antenna length shown in figure 7, and it is also decreased for higher values of ϵ_d . The calculations of surface wave efficiency have not been carried out in the case of antennas located on the surface of the dielectric layer.

For dielectric layers of $\epsilon_d/\epsilon_0 < 1$ (approximation of a plasma layer by an isotropic dielectric) the impedance curves of figure 9 are much smoother than for $\epsilon_d/\epsilon_0 > 1$, when the layers could support surface waves. Also the radiation efficiency is decreased more gradually

with increasing layer thickness.

Variational approximations to the current distributions of the antenna configurations shown in figures 4-9 are computed from equations (6) and (7) and are shown in figures 10 and 11. There are significant deviations from the usually assumed half wave sinusoidal current distribution and these deviations become more significant with increasing thickness of the dielectric layer d , the antenna length l or the dielectric constant ϵ_d . Thick layers of a lossy dielectric make the current distribution approach a triangular one. A similar change is observed with increasing layer thickness d if $\epsilon_d < \epsilon_0$ and with the decreasing ϵ_d in figure 11 when the antenna tends to become electrically shorter.

The above approximate current distributions are the best possible fits to the actual current distribution using the trial function (6) and should be indicative of the trends observed in the actual current distributions with changing antenna parameters.

3.4 Insulated Antenna in Dissipative Medium

The calculated admittance of an insulated strip antenna in a dissipative medium is compared with admittance measurements by Iizuka [1963] in Figure 12. A cylindrical wire of radius a insulated by a cylindrical dielectric shell of outer radius b from the surrounding dissipative medium is compared with a strip line of width $4a$ laying in the center of a dielectric layer of thickness $2(b-a)$. In the limit of a highly conducting outer medium the characteristic impedance of the line Z_0 in the cylindrical geometry of $b/a = 1.4$ to 10 approximates Z_0 of the corresponding planar geometry with a 10 percent accuracy [Reference data, 1956] which may indicate an approximate equivalence of the two geometries for $\tan \delta_d \gg 1$. The comparisons of the calculated and measured admittance data indicates a qualitative agreement.

In Figure 13 the impedance of an insulated cylindrical wire measured by Guy [Figures 3.24 and 3.25, 1962] is compared with transmission line calculations following Guy and Hasserjian [1963] and with calculations for the approximately equivalent model of the strip antenna. The calculated resistance data agree very well with measurements but there is only fair agreement with the measured reactance. The transmission line theory gives too low resistance figures for small antenna lengths and it also produces too large resonance peaks in resistance and reactance. These observations are particularly pronounced in the present example where $\tan \delta_g$ varies from 2.4 to 0.3 in the frequency range indicated in Figure 13. The same basic differences

between transmission line theory and the measured data can be seen from other measurements with higher loss tangents (Figures 3.12 to 3.29 of Gay [1962] or Figures 3 and 5, Fenwick and Weeks [1962]).

The impedance of an insulated strip antenna located near the interface between free space and a lossy dielectric half space (ground) is shown in Figure 14 for several values of the loss $\tan \delta_g$. The transmission line theory is applied to an approximately equal geometry with a cylindrical conductor in Figure 15. For $\tan \delta_g = 100$ there is fair agreement between the two sets of calculations, but for $\tan \delta_g = 10$ the transmission line theory gives an increase in the size of the resonant peaks, while they are definitely lower for the calculations shown in Figure 14. Also there is a significant increase of the resistance for short antenna lengths and there is a relatively small variation of the resistance component with the changing antenna length for $\tan \delta_g = 1$. The high values of resistance for a small antenna lengths indicate significant power dissipation in the vicinity of the antenna. For a dipole in direct contact with the ground, the resistance should approach infinity, but insulation and the finite antenna length have the effect of keeping this resistance finite. The radiation efficiency should be improved by decreasing values of $\tan \delta_g$, but for short antenna lengths and for $\tan \delta_g = 10$ the efficiency is nearly the same as for $\tan \delta_g = 1$, due to the very high resistance components shown in Figure 14 for $\tan \delta_g = 1$. The resistance components shown for a short antenna in Figure 14 with $\epsilon_g/\epsilon_0 = 6$ are higher than those of Figure 13 with $\epsilon_g/\epsilon_0 = 80$ for the lower frequencies, because in the latter case there is a large difference in dielectric constant between the dielectric and ground, and as a consequence, less of the near fields is stored in the ground with smaller attendant ohmic losses.

3.5 Conclusions

In the present variational formulation the antenna impedance is expressed as a double integral that is evaluated numerically, except for the trivial case of a thin half-wave antenna. For an antenna in a homogeneous medium the present formulation gives reasonable agreement with other theories [King, 1956; Wu, 1961] and it has been correlated also with impedances computed from complementary slot antennas [Galejs, 1964]. The antenna impedances and radiation efficiencies have been also computed for antennas on or within dielectric layers and radiation efficiencies of 60 percent or more can be achieved with dielectric layers of moderately dielectric constants ($\epsilon_d/\epsilon_0 < 3$) and with layer thickness of less than 0.01λ .

For insulated antenna within an infinite dissipative medium the calculations have been correlated with measurements of Iizuka [1963] and Guy [1962] and also with transmission line theory. Further comparisons have been made between the present formulation and the transmission line theory for insulated antenna near the interface between free space and a semi-infinite lossy dielectric. The transmission line theory is shown to give too large resonance peaks of the input resistance and reactance. Also it gives too low resistance for shorter antennas.

4.0 ACKNOWLEDGEMENT

Appreciation is expressed to Mr. M. Ciccia for computing programming. This research was supported in part by AFCRL, Office of Aerospace Research, under Contract No. AF 19(628)-2410.

APPENDIX

FIELD COMPONENTS

The fields excited in the geometry of Fig. 1 will be expressed as a superposition of TE and TM modes that are derived from scalar functions Ψ_j and Φ_j respectively. The region of $z \geq 0$ next to the antenna is designated by a subscript 0, the region of $z \leq 0$ - by a subscript 1. For an $\exp(-i\omega t)$ time dependence of the fields the scalar functions are of the form

$$\Psi_0 = \iint A_0(u, v) e^{-iux} e^{-ivy} (e^{\gamma_0 z} + R_{a0} e^{-\gamma_0 z}) du dv \quad (40)$$

$$\Phi_0 = \iint B_0(u, v) e^{-iux} e^{-ivy} (e^{\gamma_0 z} + R_{b0} e^{-\gamma_0 z}) du dv \quad (41)$$

$$\Psi_1 = \iint A_1(u, v) e^{-iux} e^{-ivy} (e^{-\gamma_1 z} + R_{a1} e^{\gamma_1 z}) du dv \quad (42)$$

$$\Phi_1 = \iint B_1(u, v) e^{-iux} e^{-ivy} (e^{-\gamma_1 z} + R_{b1} e^{\gamma_1 z}) du dv \quad (43)$$

where R_{aj} and R_{bj} are reflection coefficients. The field components are related to Ψ_j and Φ_j by

$$E_{xj} = \frac{\partial}{\partial y} \Psi_j + \frac{\partial^2}{\partial z \partial x} \Phi_j \quad (44)$$

$$E_{yj} = -\frac{\partial}{\partial x} \Psi_j + \frac{\partial^2}{\partial z \partial y} \Phi_j \quad (45)$$

$$E_{zj} = -\left(\frac{\partial^2}{\partial x^2} + \frac{\partial^2}{\partial y^2} \right) \Phi_j \quad (46)$$

$$H_{xj} = \frac{1}{i\omega\mu_0} \left[\frac{\partial^2}{\partial z \partial x} \Psi_j + k_j^2 \frac{\partial}{\partial y} \Phi_j \right] \quad (47)$$

$$H_{yj} = \frac{1}{i\omega\mu_0} \left[\frac{\partial^2}{\partial z \partial y} \Psi_j - k_j^2 \frac{\partial}{\partial x} \Phi_j \right] \quad (48)$$

$$H_{zj} = -\frac{1}{i\omega\mu_0} \left(\frac{\partial^2}{\partial x^2} + \frac{\partial^2}{\partial y^2} \right) \Psi_j \quad (49)$$

The current of a linear density J_x is assumed to flow only in the x direction along the antenna and the field components satisfy the boundary conditions $E_{x1} = E_{x0}$, $E_{y1} = E_{y0}$, $H_{x1} = H_{x0}$, $H_{y1} = H_{y0} + J_x$, for $z = 0$. After substituting (40) to (43) in (44) and (45) and applying the E_x and E_y boundary conditions it follows that

$$A_o(1+R_{ao}) = A_1(1+R_{a1}) \quad (50)$$

$$\gamma_o B_o(1-R_{bo}) = \gamma_1 B_1(-1+R_{b1}) \quad (51)$$

The H_x and H_y boundary conditions lead to

$$\begin{aligned} -\gamma_o B_o(1-R_{bo}) \left[\frac{k_o^2(1+R_{bo})}{\gamma_o(1-R_{bo})} + \frac{k_1^2(1+R_{b1})}{\gamma_1(1-R_{b1})} \right] \\ = \frac{\omega\mu_o u}{u^2+v^2} \left(\frac{1}{2\pi} \right)^2 \iint J_x e^{iux} e^{ivy} dx dy \end{aligned} \quad (52)$$

$$\begin{aligned} A_o(1+R_{ao}) \left[\gamma_o \frac{1-R_{ao}}{1+R_{ao}} + \gamma_1 \frac{1-R_{a1}}{1+R_{a1}} \right] \\ = \frac{\omega\mu_o v}{u^2+v^2} \left(\frac{1}{2\pi} \right)^2 \iint J_x e^{iux} e^{ivy} dx dy \end{aligned} \quad (53)$$

The amplitudes A_j and B_j are related to the linear current density of the antenna J_x by (50) to (53). The scalar functions Ψ_j and Φ_j , and the field components (44) to (49) are thus uniquely related to J_x .

References

1. R. C. Fenwick and W. L. Weeks, (May 1963), "Submerged Antenna Characteristics," IEEE Trans. on Antennas and Propagation, Vol. AP-11, No. 3, pp. 296 to 305.
2. J. Galejs, (March 1963), "Admittance of a Rectangular Slot which is backed by a Rectangular Cavity," IEEE Trans. on Ant. and Prop., Vol. 11, pp. 119-126.
3. J. Galejs, (November 1964) "Slot Antenna Impedance for Plasma Layers," IEEE Trans. on Antennas and Propagation, Vol. AP-12, No. 6.
4. J. Galejs, (January 1965a), "Admittance of a Waveguide Radiating into Stratified Plasma," IEEE Trans. on Ant. and Prop., Vol. AP-13.
5. J. Galejs (February 1965b), "Self and Mutual Admittances of Waveguides Radiating into Plasma Layers," RADIO SCIENCE, J. Res. NBS, Vol. 69D, No. 2.
6. J. Galejs, (March 1965c), "Admittance of insulated loop antennas in a dissipative medium," IEEE Trans. on Ant. and Prop., Vol. AP-13.
7. R. N. Ghose, (1960), "The radiator-to-medium coupling in an underground communication system," Proc. Nat. Elec. Conf; Vol. 16, pp. 279-289.
8. D.W. Gooch, C.W. Harrison, Jr., R.W.P. King and T.T. Wu (May-June 1963), "Impedances of Long Antennas in Air and Dissipative Media," RADIO SCIENCE, NBS J. Res., Vol. 67D, No. 3, pp. 355-360, Also. Tech. Rept. No. 353, Cruft Laboratory, Harvard University.
9. A.W. Guy (1962), "Experimental data on buried antennas," Report No. D2-90051, The Boeing Company, Seattle, Washington.
10. A.W. Guy and G. Hasserjian (May 1963), "Impedance properties of large subsurface antenna arrays," IEEE Trans. on Ant. and Prop., Vol. AP-11, No. 3, pp.232-240.
11. R.F. Harrington (1961), "Time-harmonic electromagnetic fields," McGraw-Hill Book Co., New York.
12. K. Iizuka (September 1963), "An experimental study of the insulated dipole antenna immersed in a conducting medium," IEEE Trans. on Ant. and Prop., Vol. AP-11, pp. 518-532.
13. K. Iizuka and R.W.P. King (July 1962), "The Dipole Antenna Immersed in a Homogeneous Conducting Medium," IRE Trans. on Ant. and Prop. Vol. AP-10, No. 4, pp.384-392.
14. R.W.P. King (1956), "Theory of Linear Antennas," Harvard U. Press, Cambridge, Mass.
15. R.W.P. King (May 1964), "Theory of the terminated insulated antenna in a conducting medium," IEEE Trans. on Ant. and Prop., Vol. AP-12, pp. 305-318.
16. R.W.P. King and C.W. Harrison, Jr. (July-August, 1960), "Half-wave cylindrical antenna in a dissipative medium: current and impedance," J. Res. NBS, Vol. 64D, p. 365.

17. R.W.P. King and K. Iizuka, (May, 1963), "The complete electromagnetic field of dipoles in dissipative media," IRE Trans. on Antennas and Propagation, Vol. AP-11, pp. 275-285.
18. J.D. Kraus (1950), "Antennas," McGraw-Hill Book Co., Inc. New York, New York.
19. R.K. Moore (June, 1951), "Theory of Radio Communication between Submerged Submarines," Ph. D. Thesis, Cornell University, Ithaca, New York.
20. A. T. Villeneuve (Jan. 1965), "Admittance of Waveguide Radiating into Plasma Environment," IEEE Trans. on Ant. and Prop., Vol. AP-13.
21. "Reference Data for Radio Engineers," (1956), Int. Tel and Tel. Corp., New York, N.Y. 4th Ed. pp. 588 and 599.
22. R.M. Whitmer, (September 1948), "Fields in Non-metallic Waveguides," Proc. IRE, Vol. 36, No. 9, pp. 1105-1109.
23. T.T. Wu, (July-August 1961), "Theory of the Dipole Antenna and the Two-Wire Transmission Line," J. of Math. Physics, Vol. 2, No. 4, pp. 550-574.

3-1-0792

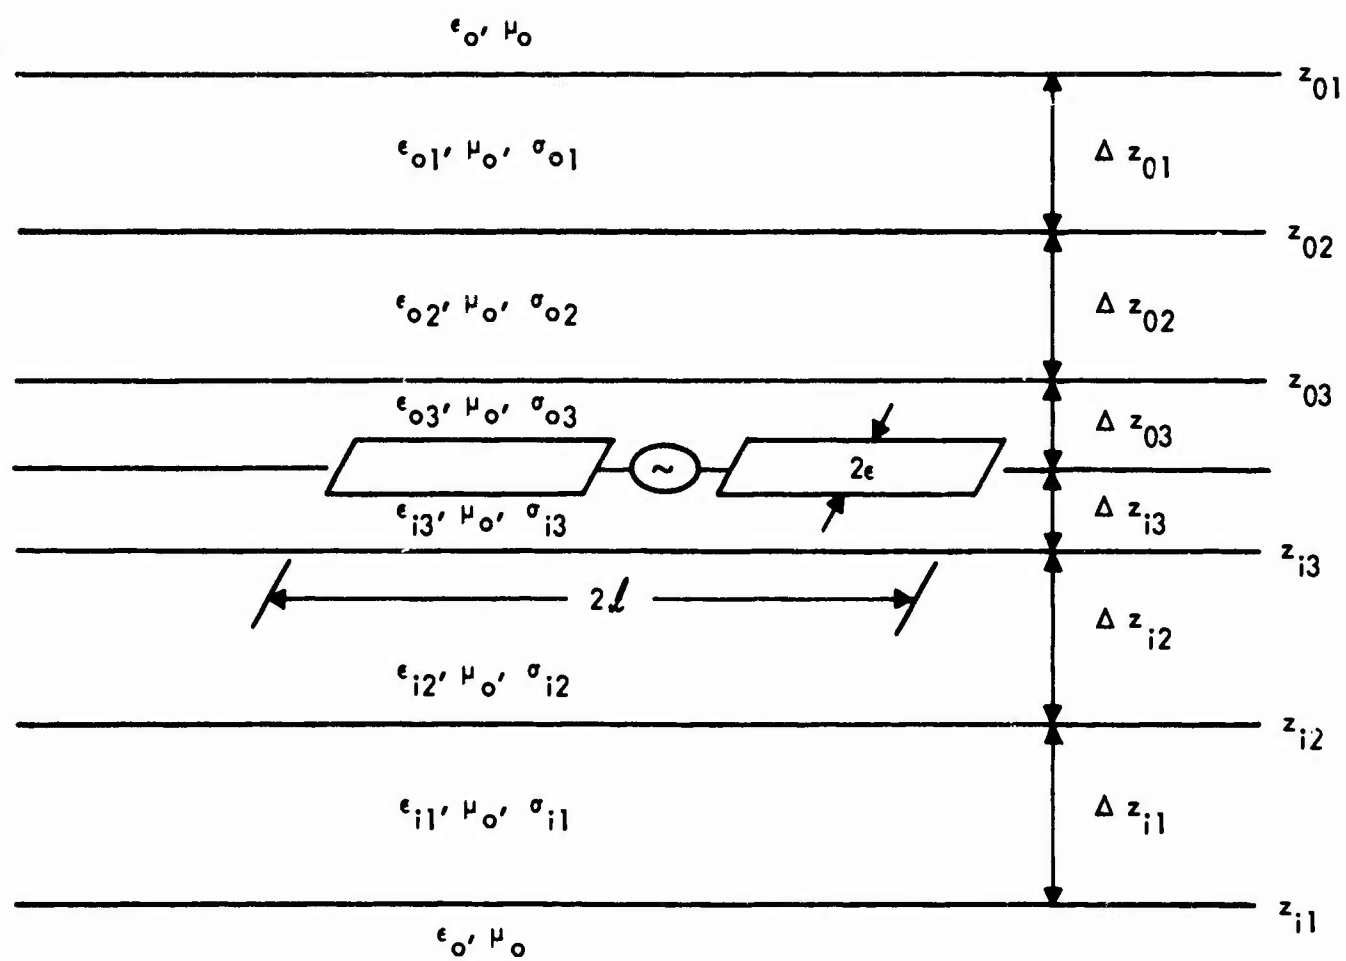


Figure 1. Antenna Geometry.

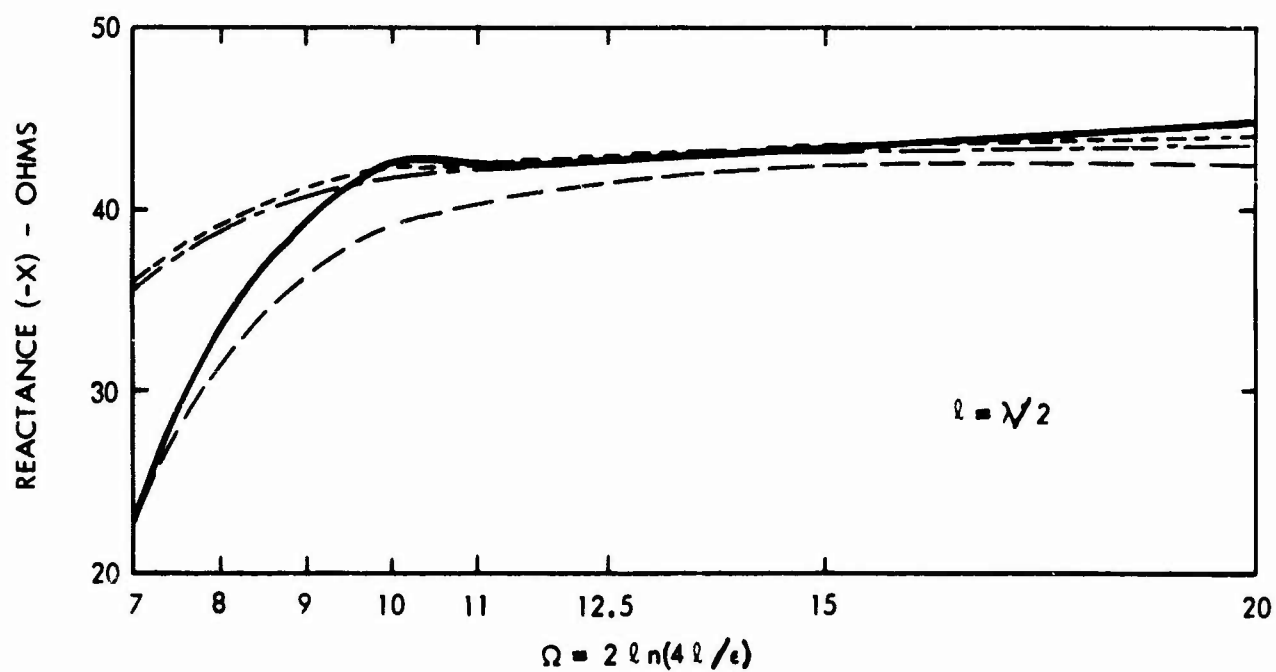
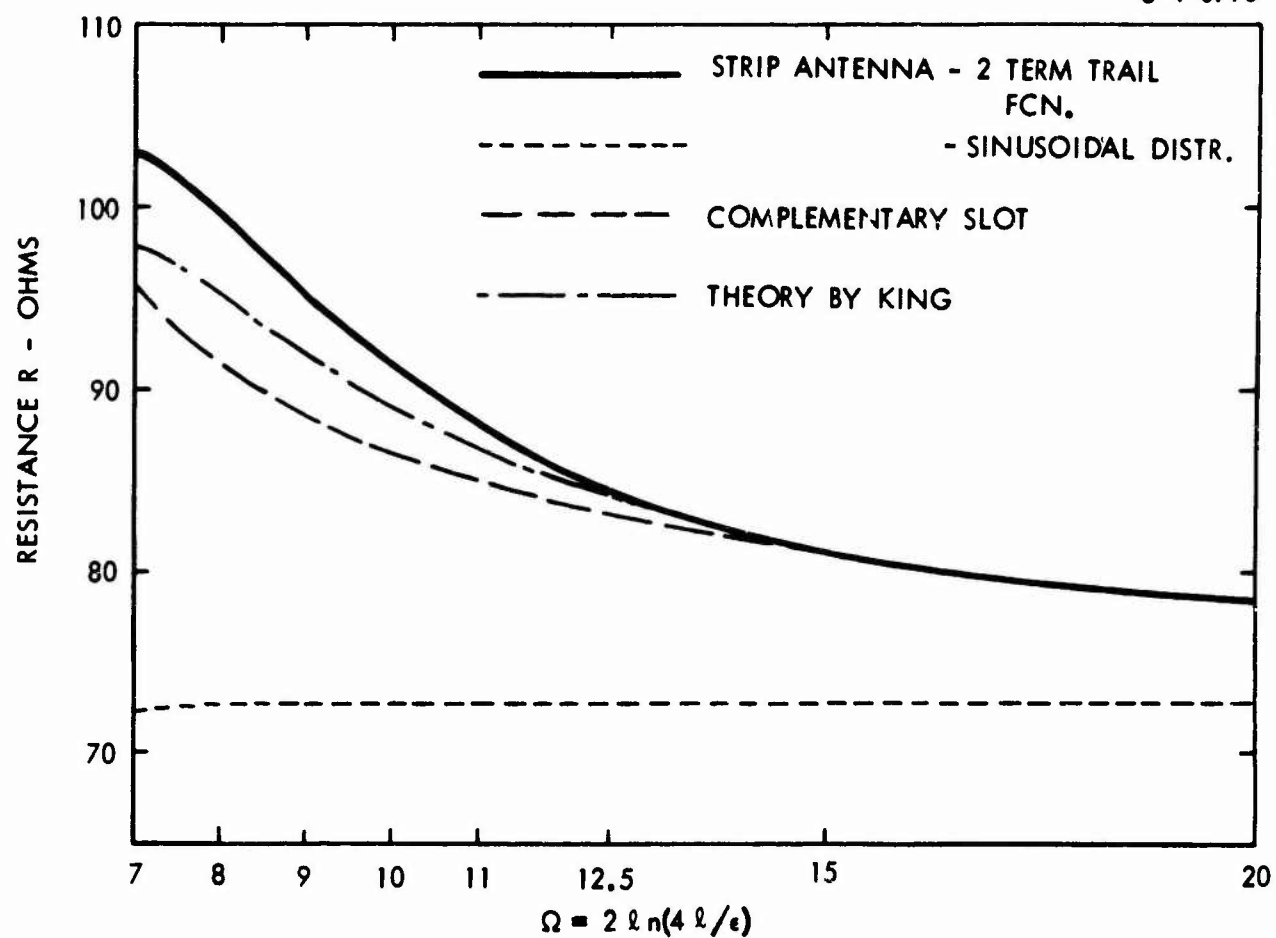


Figure 2. Free Space Antenna Impedance $Z = R + iX$.

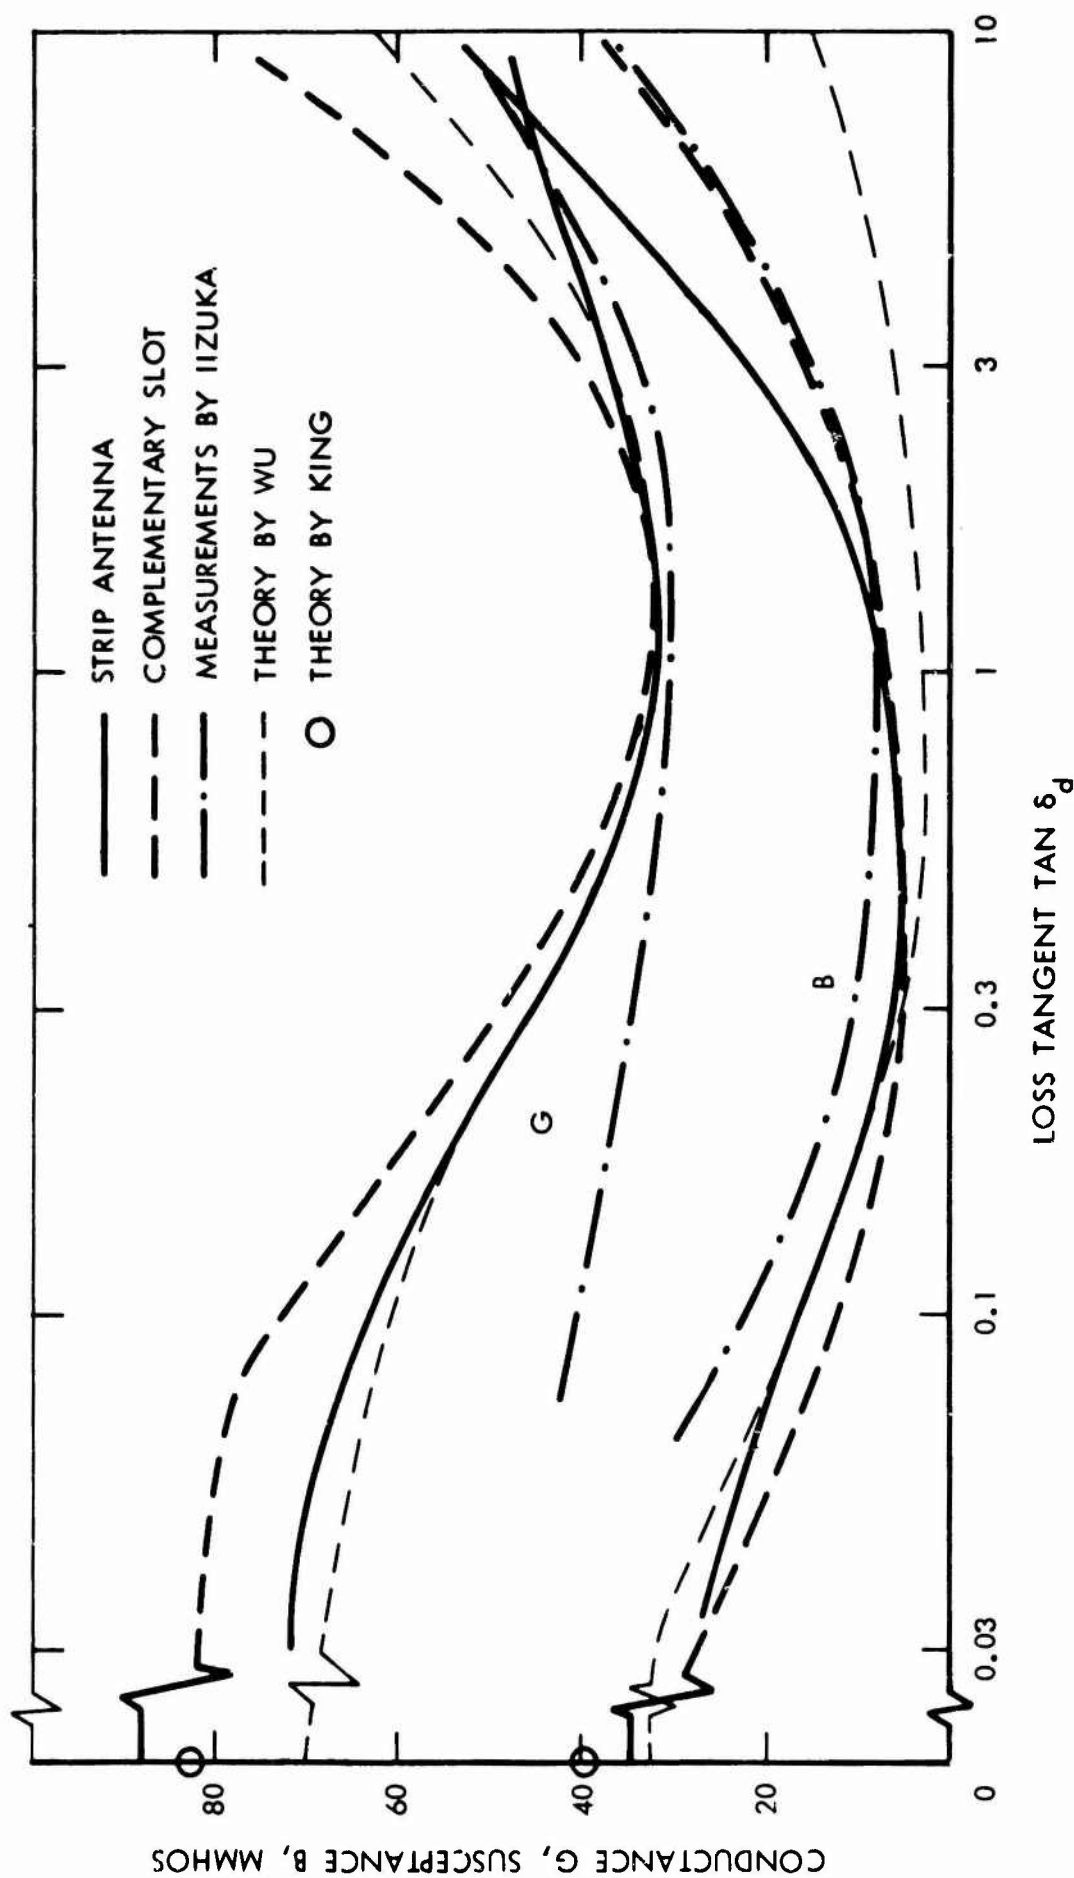


Figure 3. Admittance of a Thin Antenna in a Dissipative Medium.

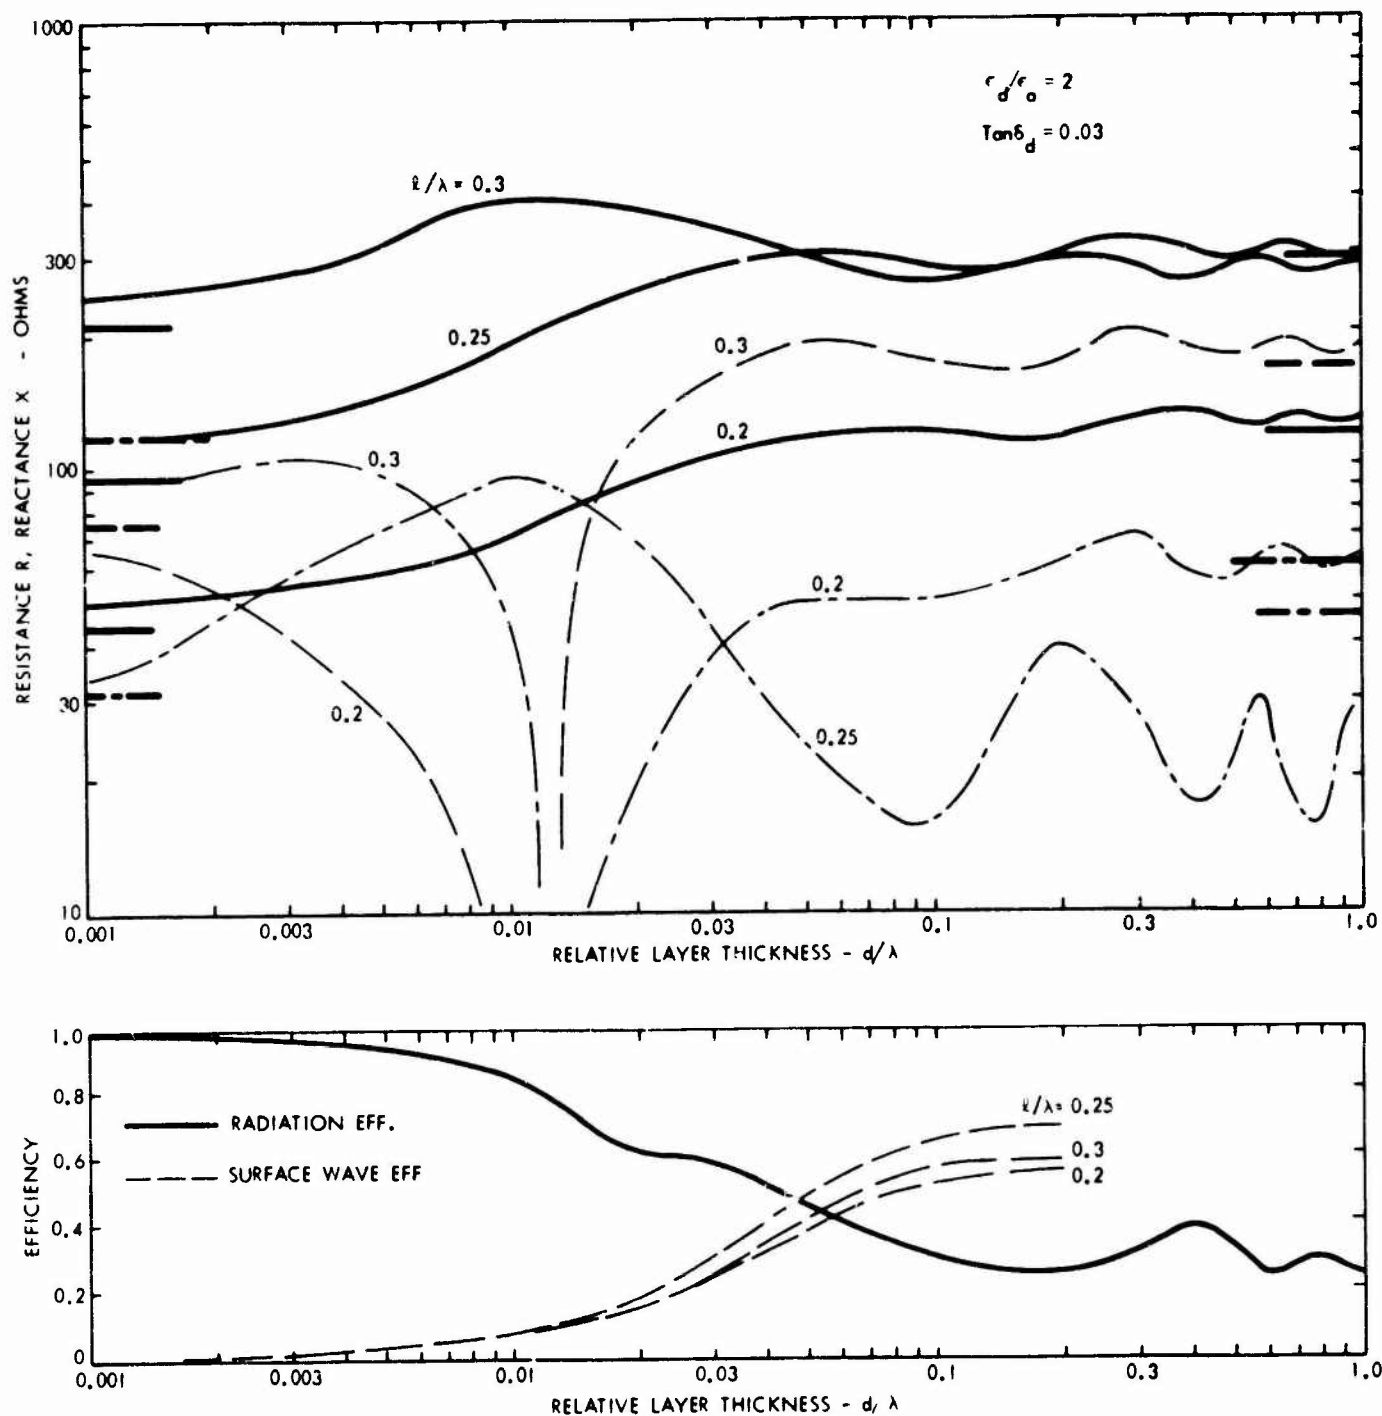


Figure 4. Impedance and Efficiency of Antennas in the Center of a Dielectric Layer. Effects of Antennas Length.

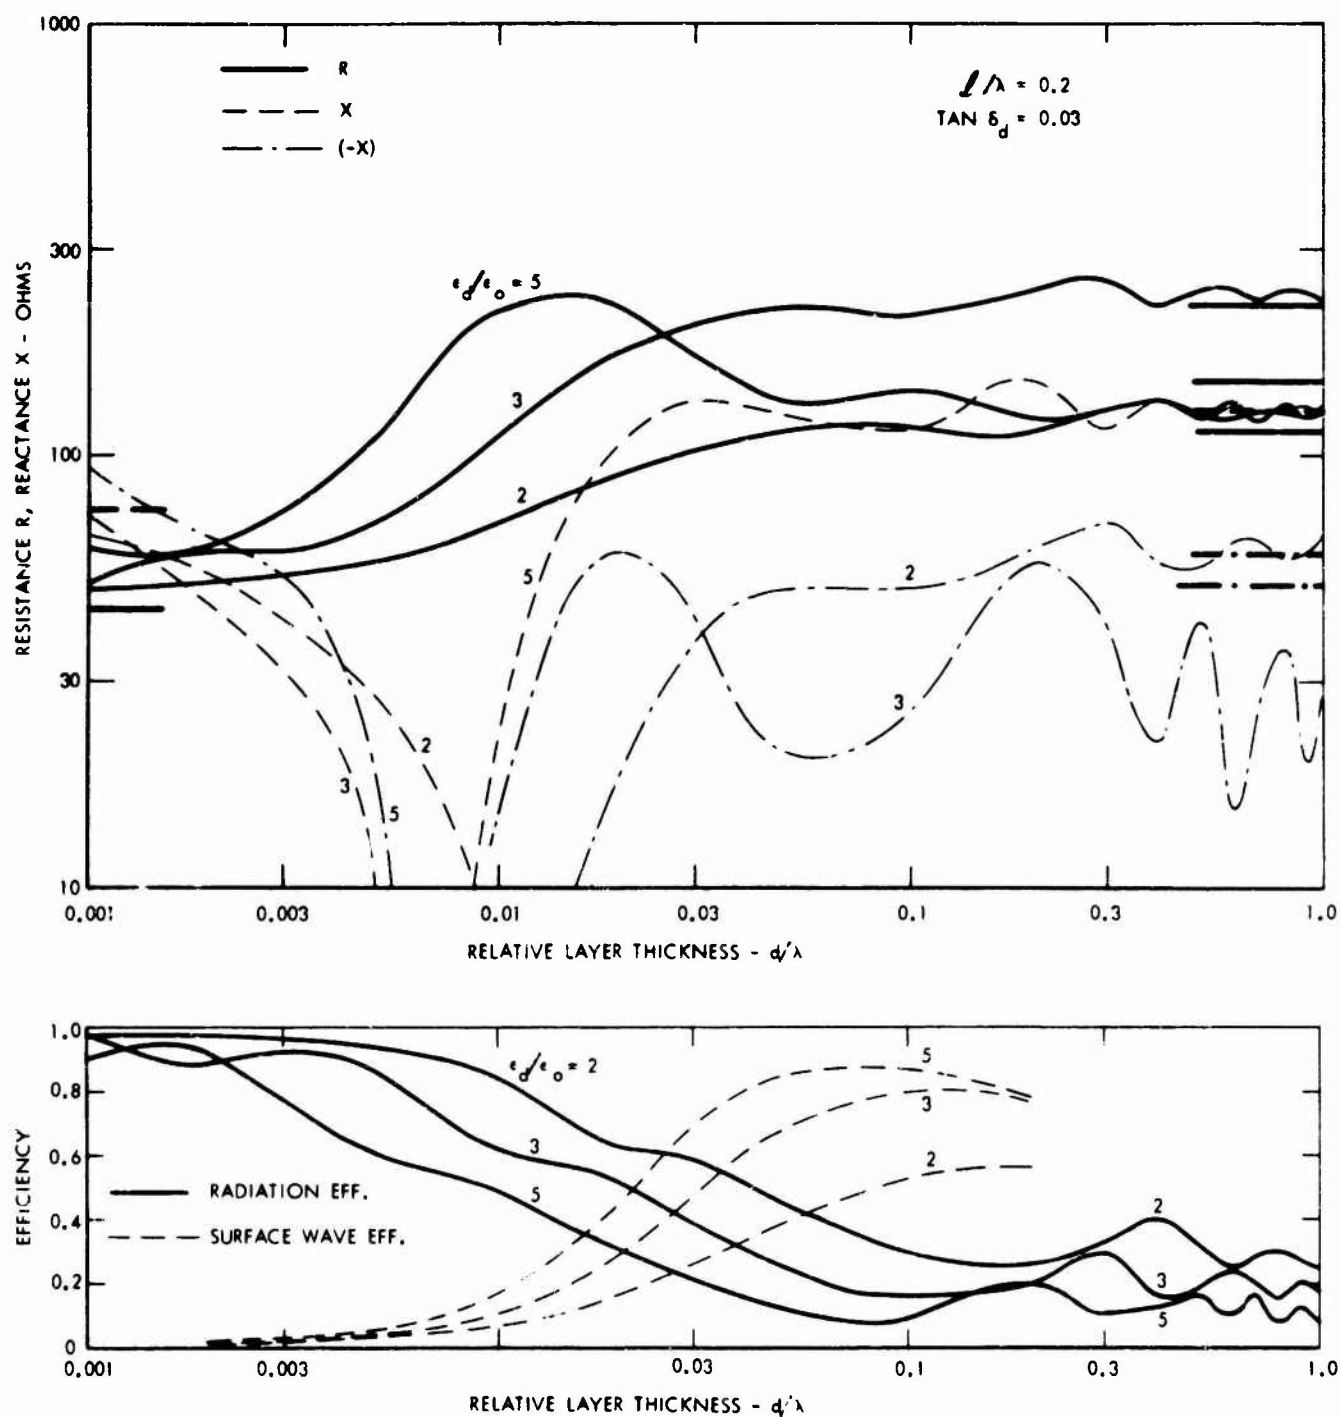


Figure 5. Impedance and Efficiency of Antennas in the Center of a Dielectric Layer. Effects of the Dielectric Constant.

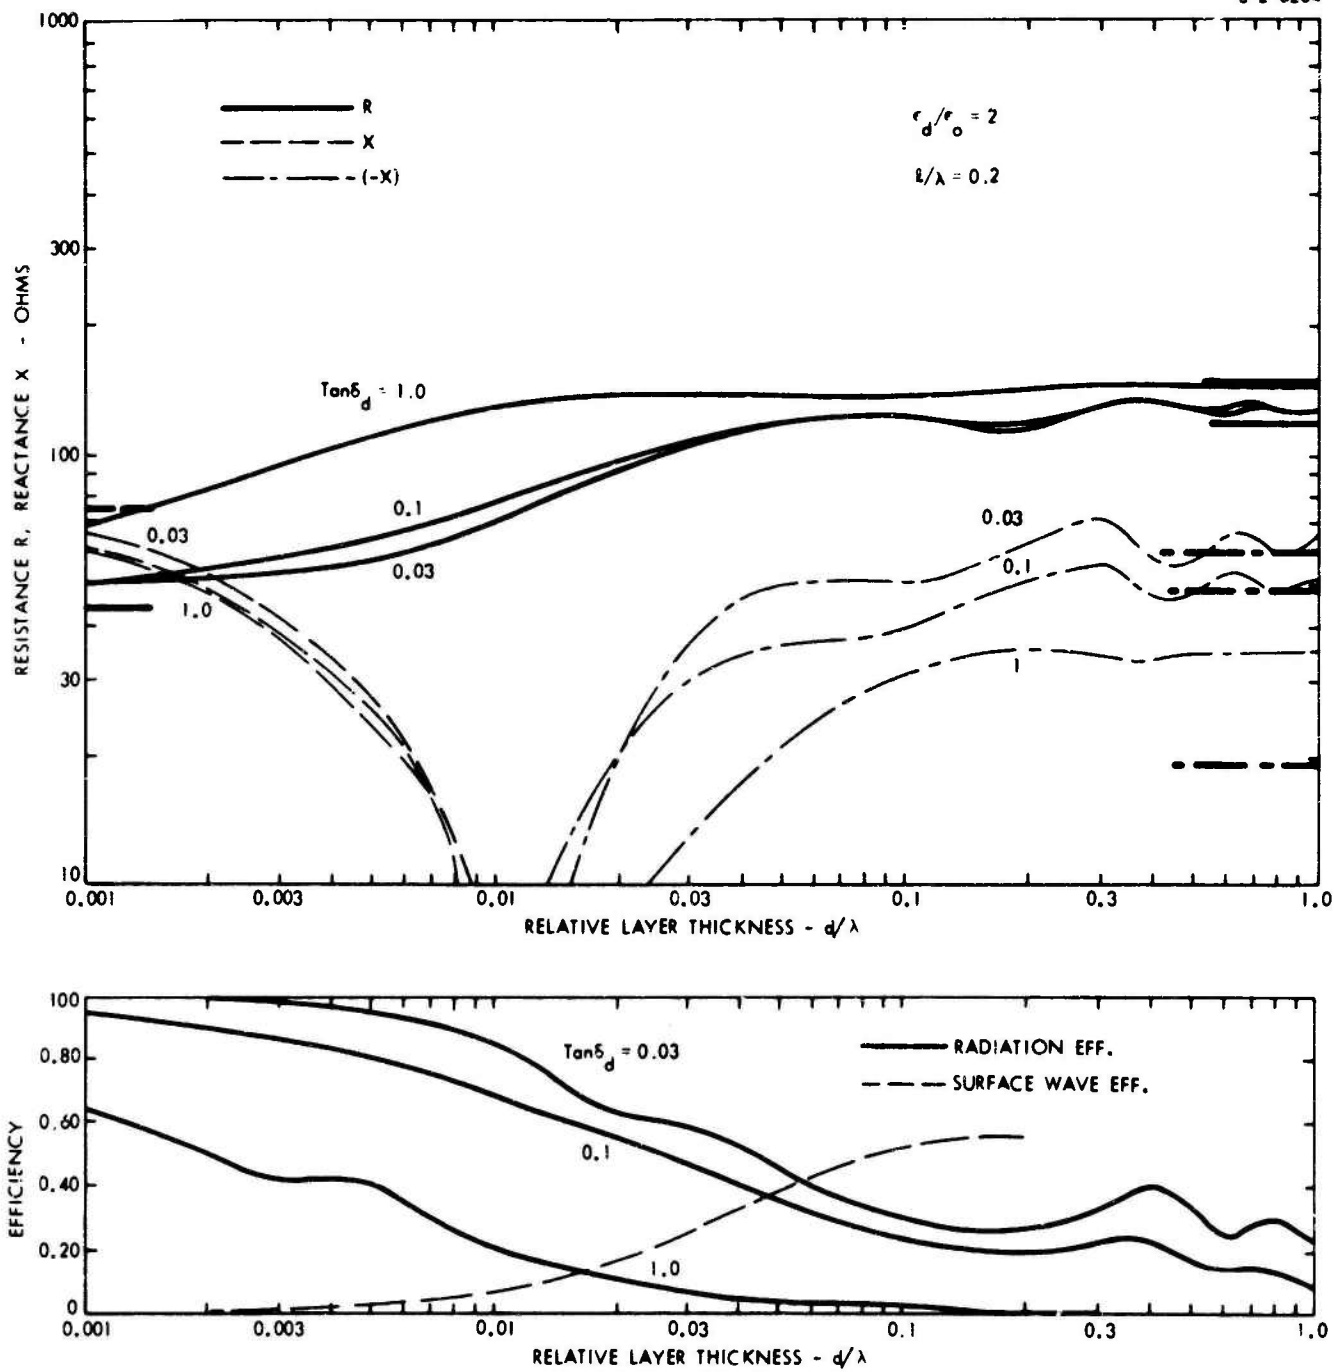


Figure 6. Impedance and Efficiency of Antenna in the Center of a Dielectric Layer. Effects of Dielectric Loss.

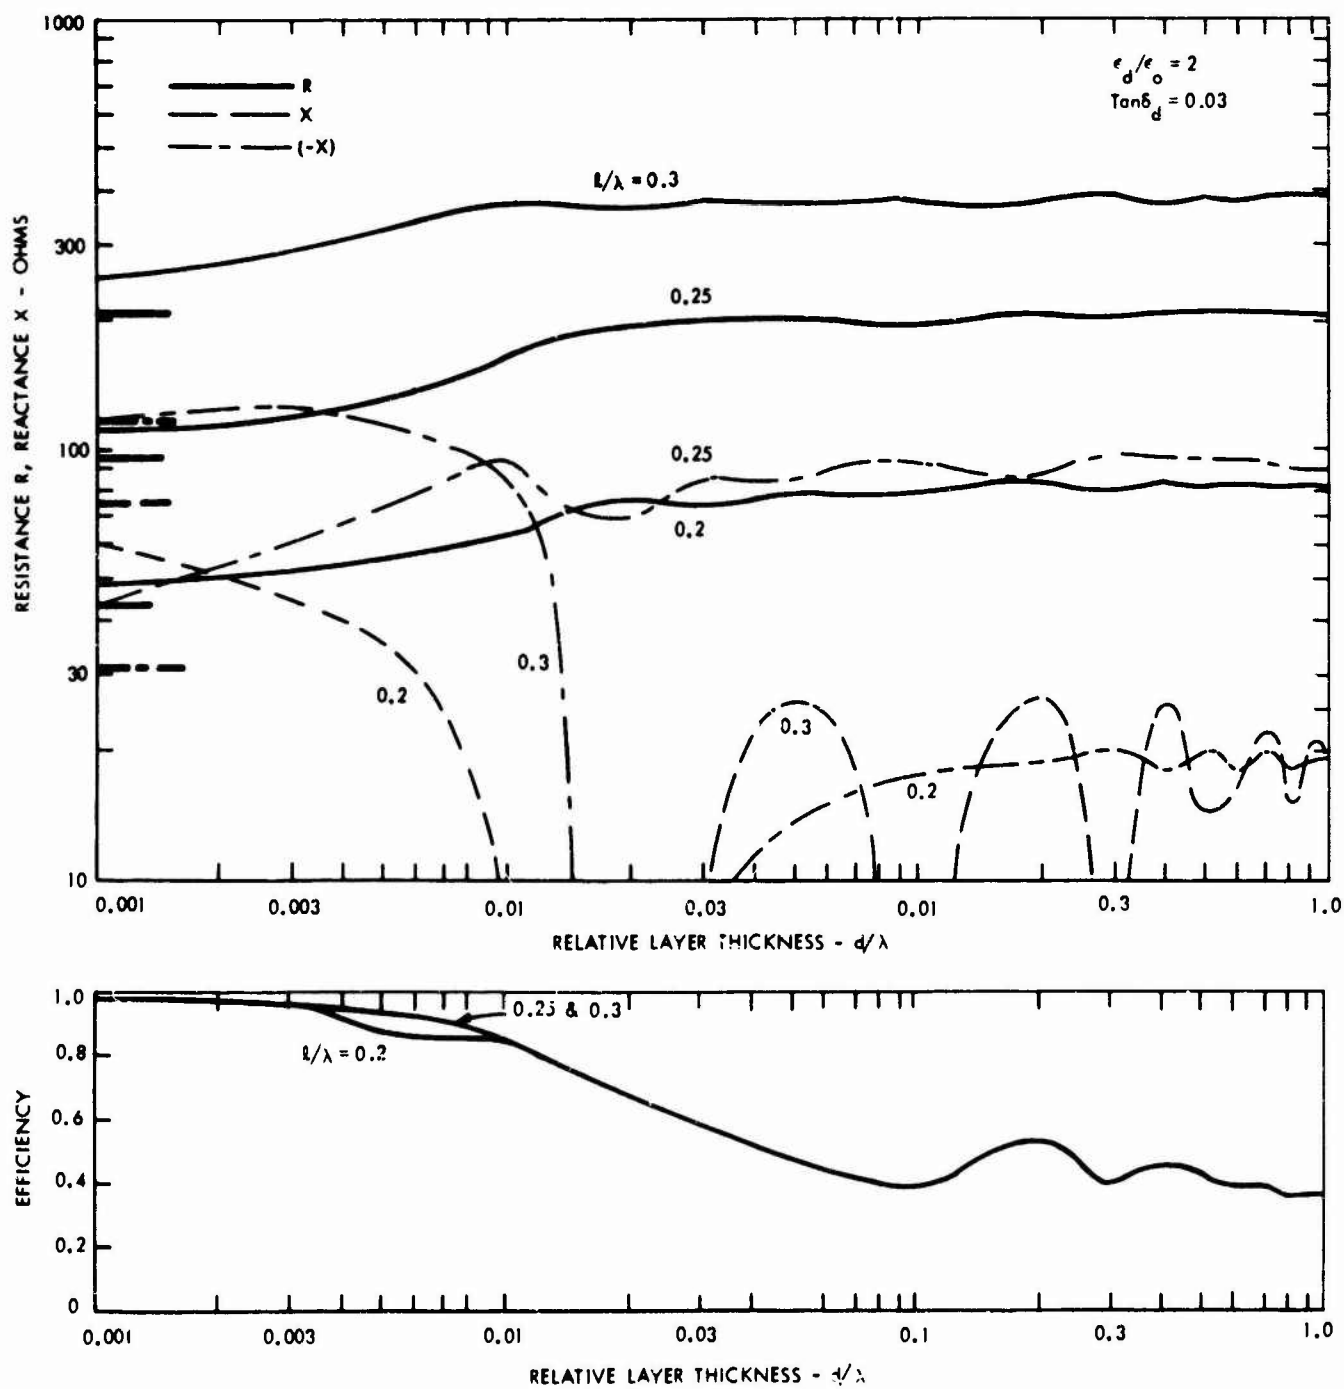


Figure 7. Impedance and Efficiency of an Antenna on the Surface of a Dielectric Layer. Effects of Antenna Length.

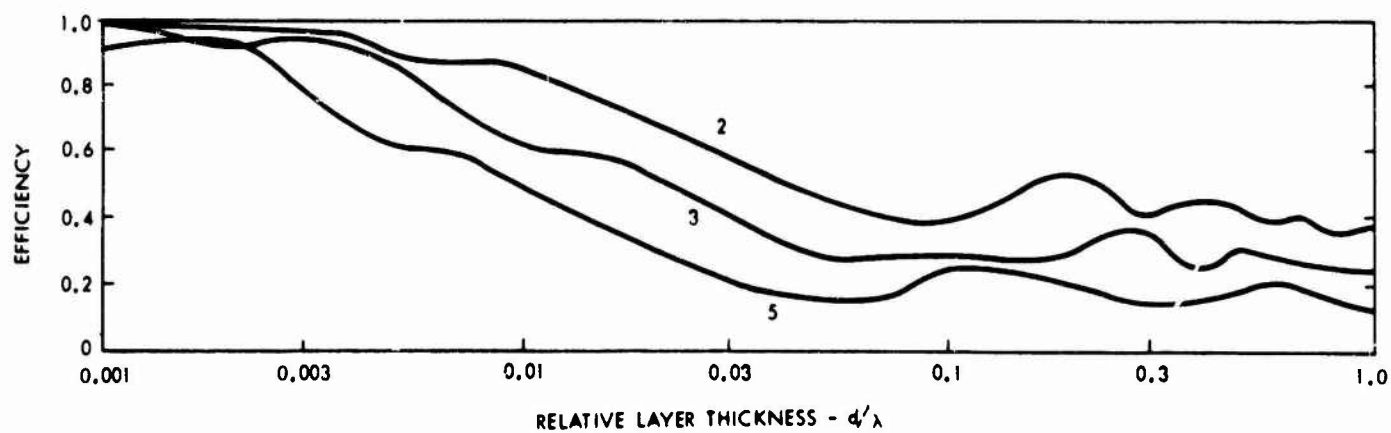
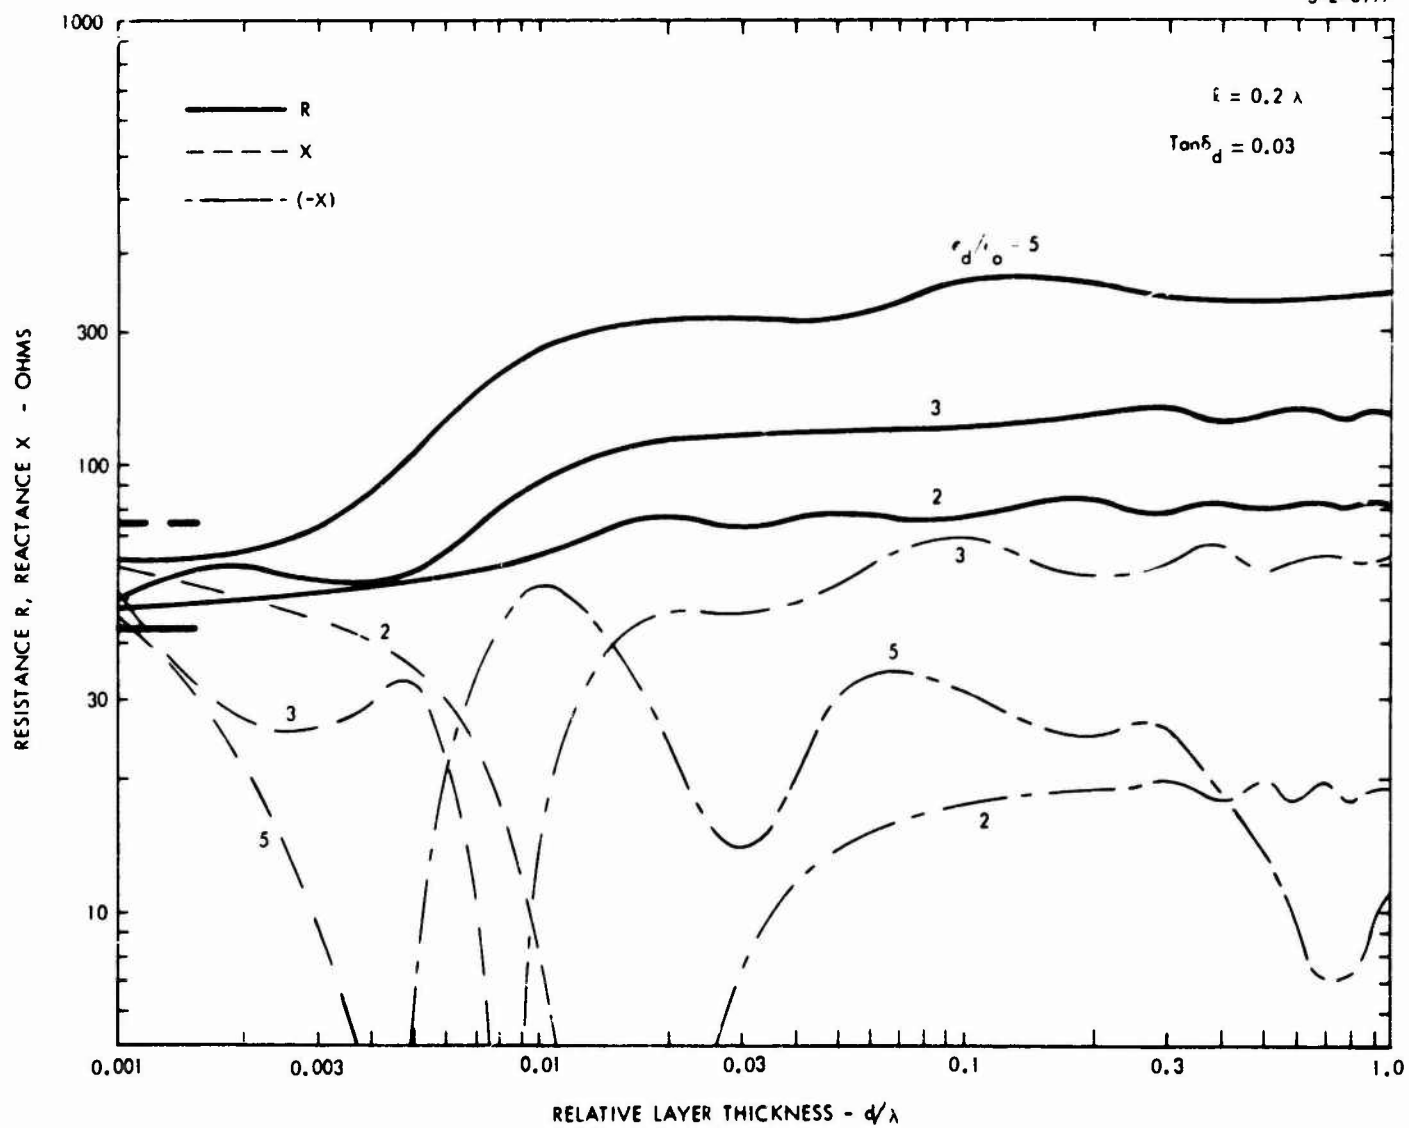


Figure 8. Impedance and Efficiency of Antennas on the Surface of a Dielectric Layer, Effects of the Dielectric Constant.

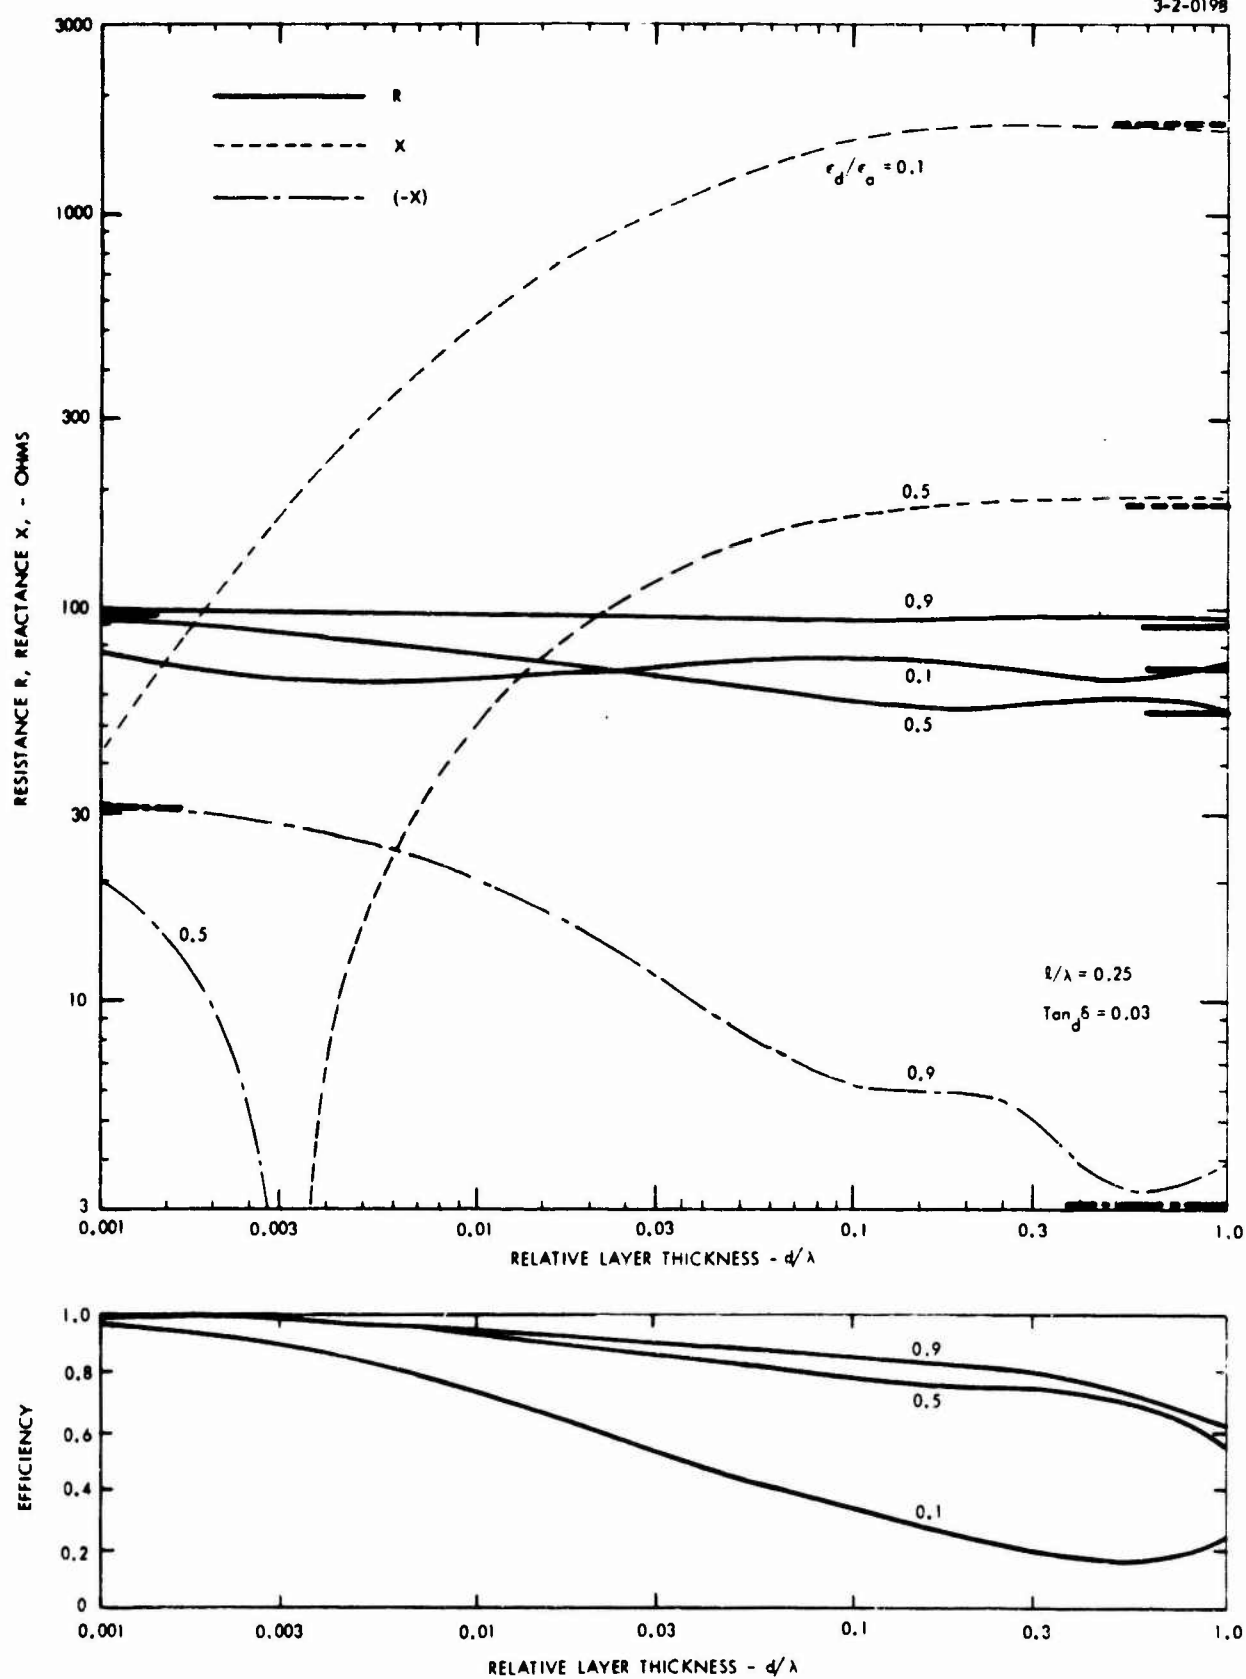


Figure 9. Impedance and Efficiency of Antennas in the Center of a Plasma Layer.

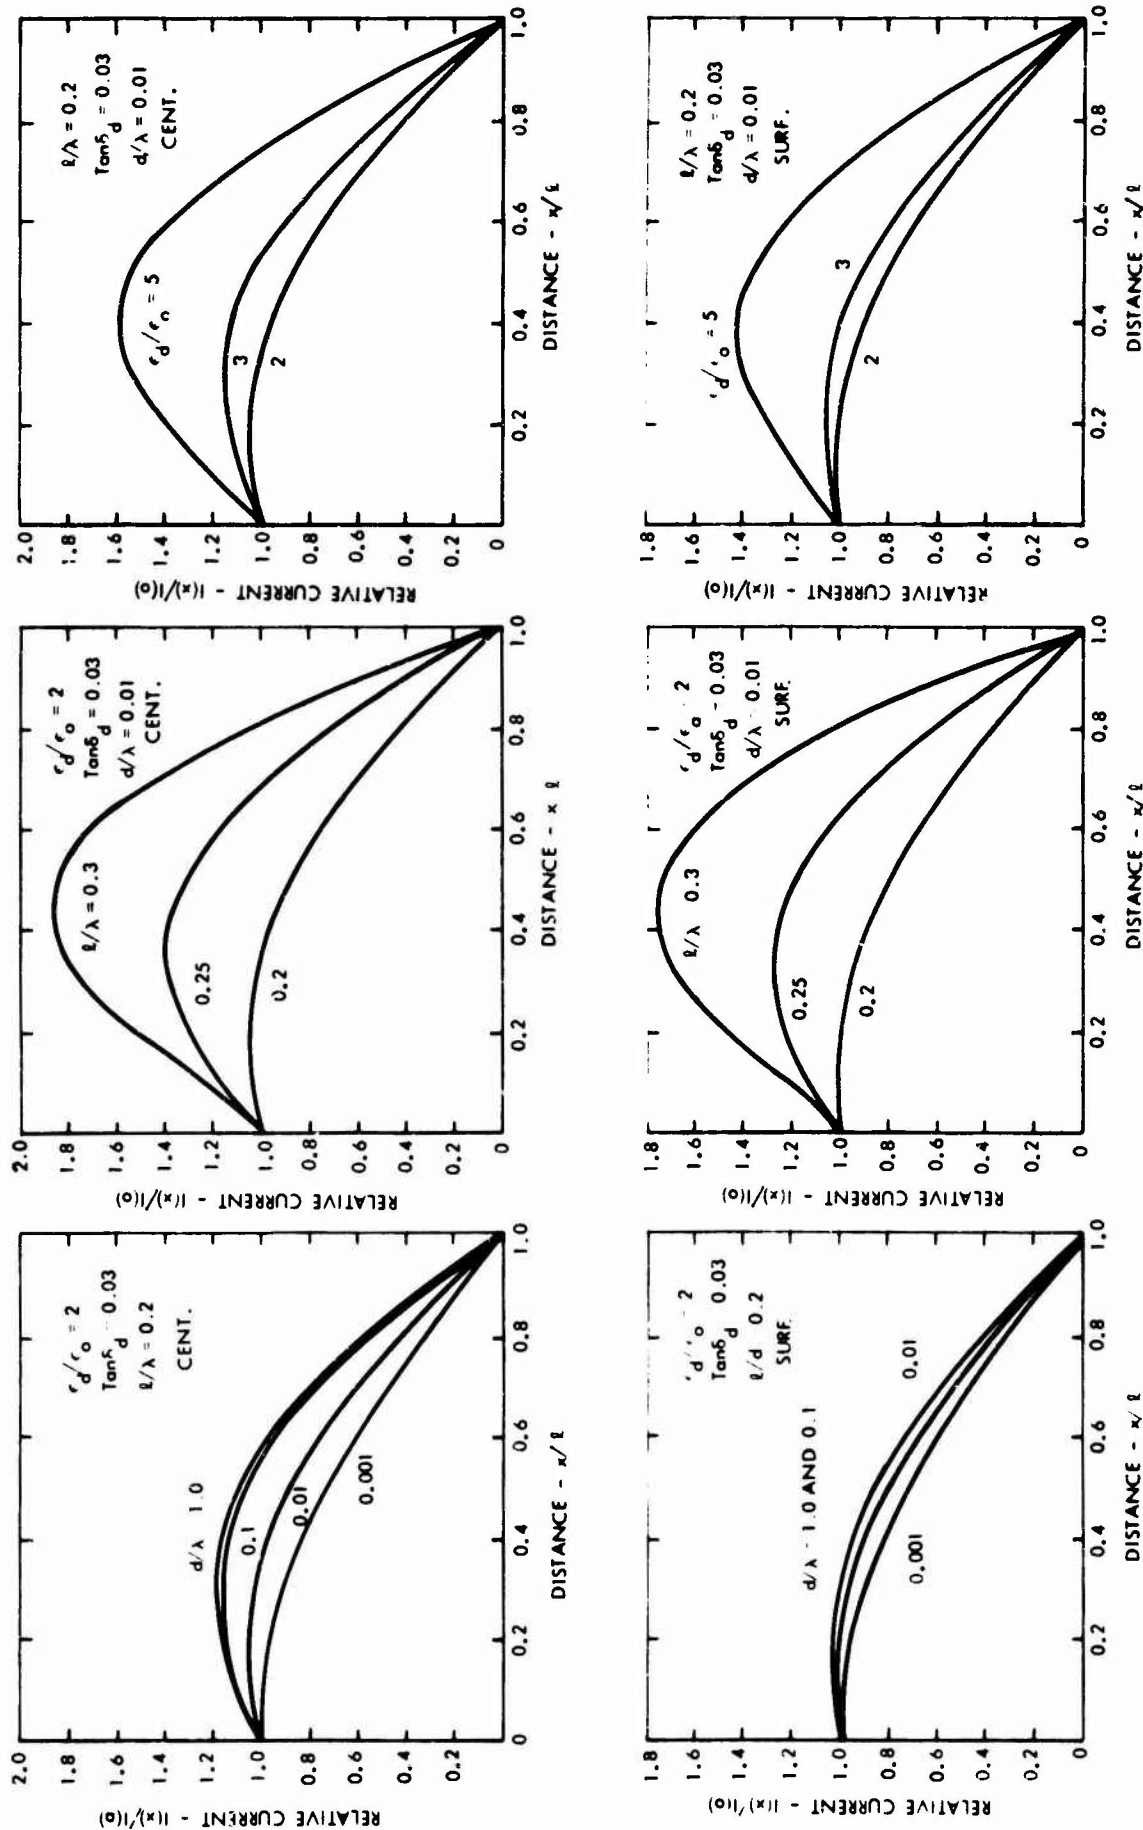


Figure 10. Variational Approximation to the Current Distribution of Antenna in the Center (CENT.) or on the Surface (SURF.) of Dielectric Layers of Thickness $2d$.




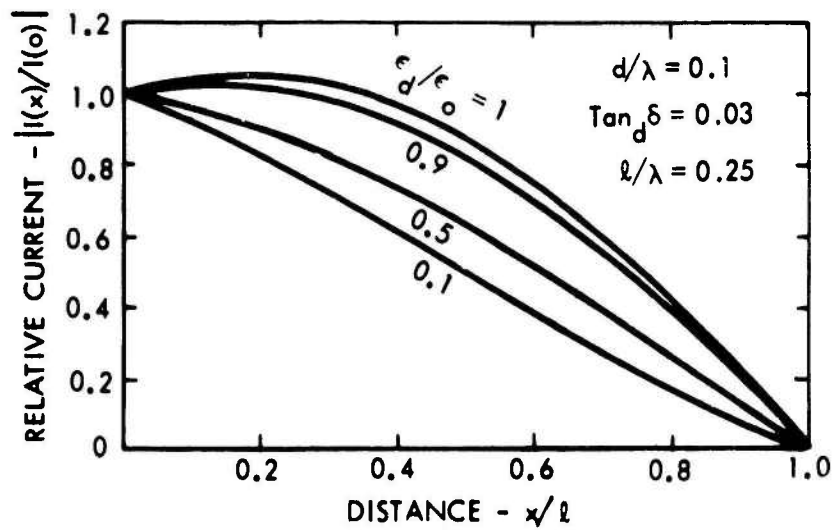


Figure 11. Variational Approximations to the Current Distributions of Antennas in the Center of a Dielectric Layer of Thickness $2d$.

(A)

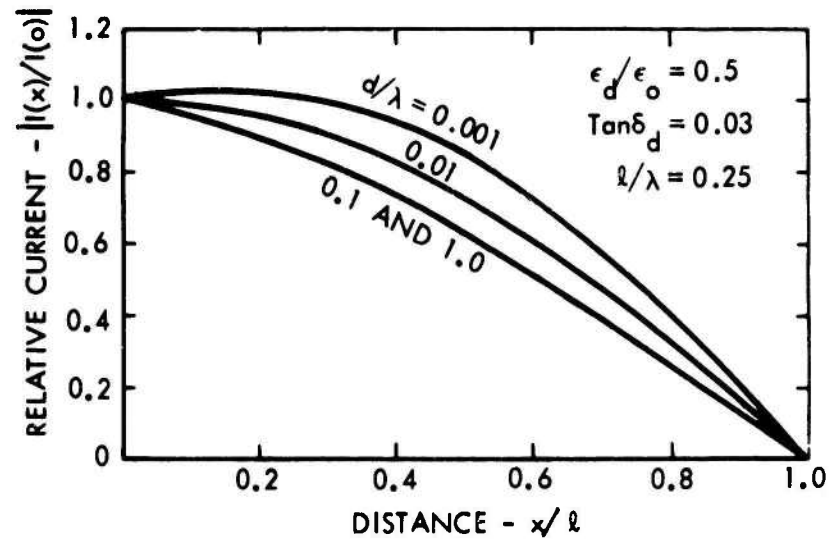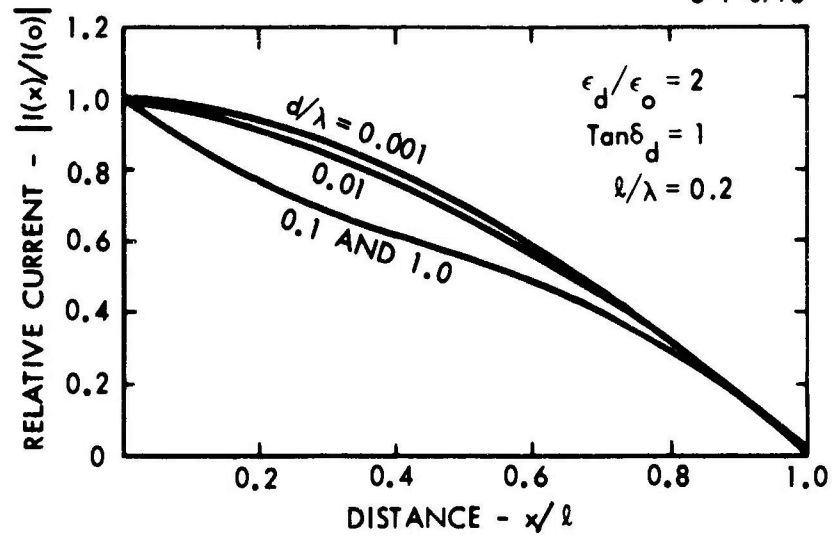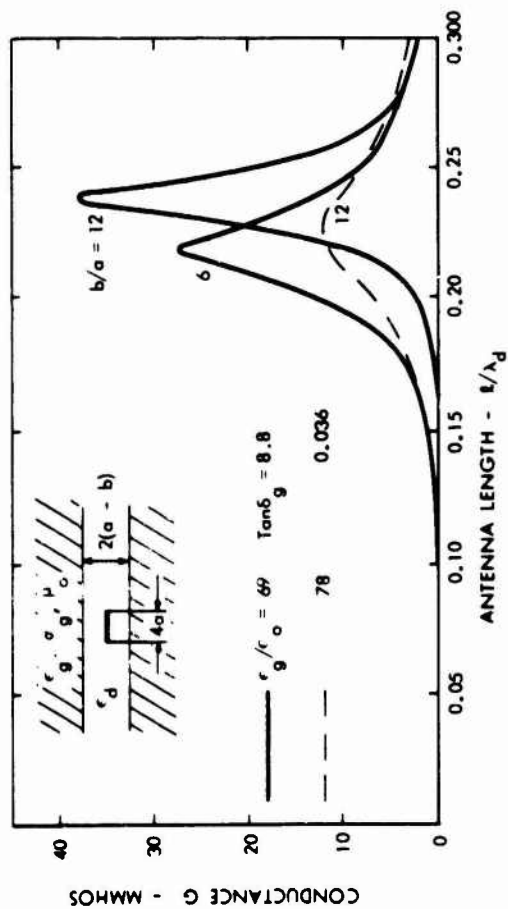

(B)

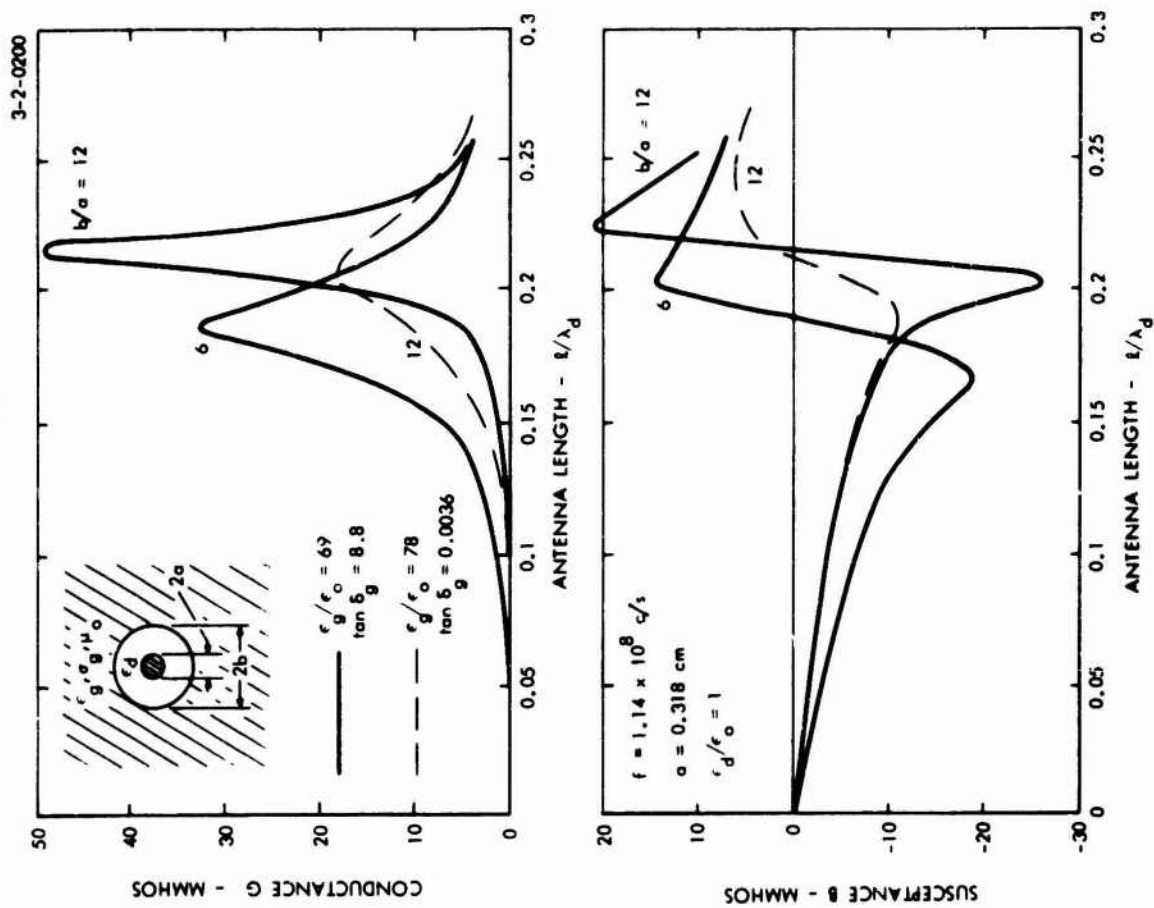


Figure 12. Admittance of an Insulated Antenna in a Dissipative Medium.
A. Calculation. B. Measurements by Iizuka.

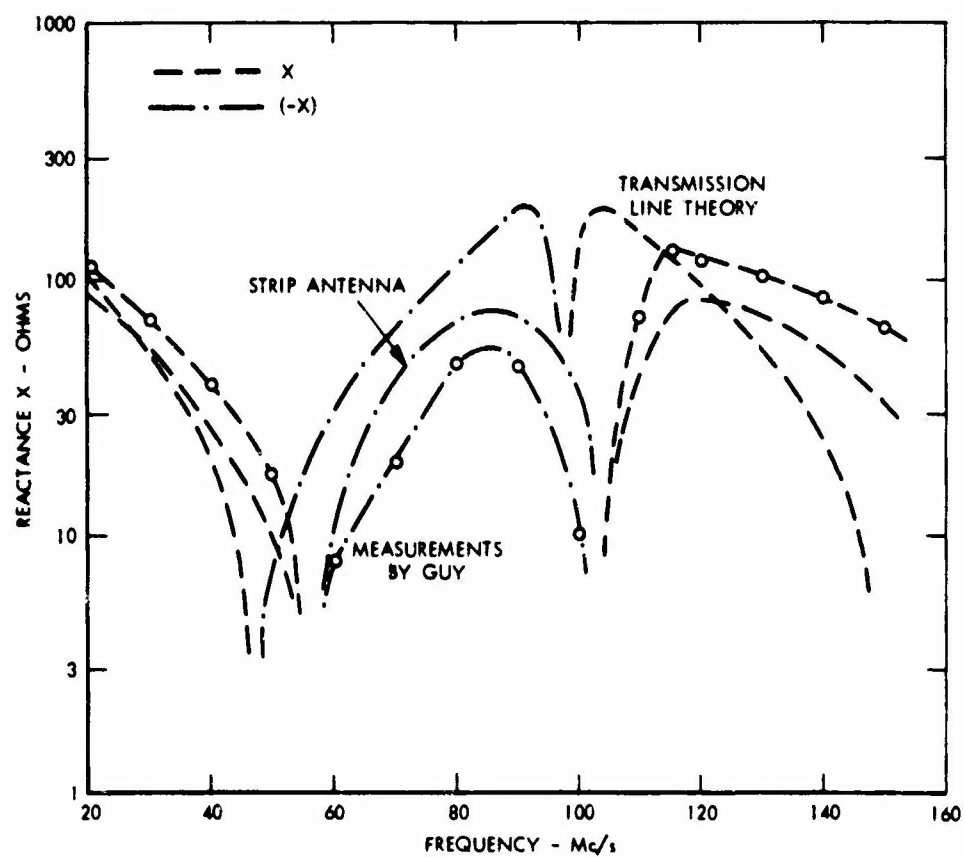
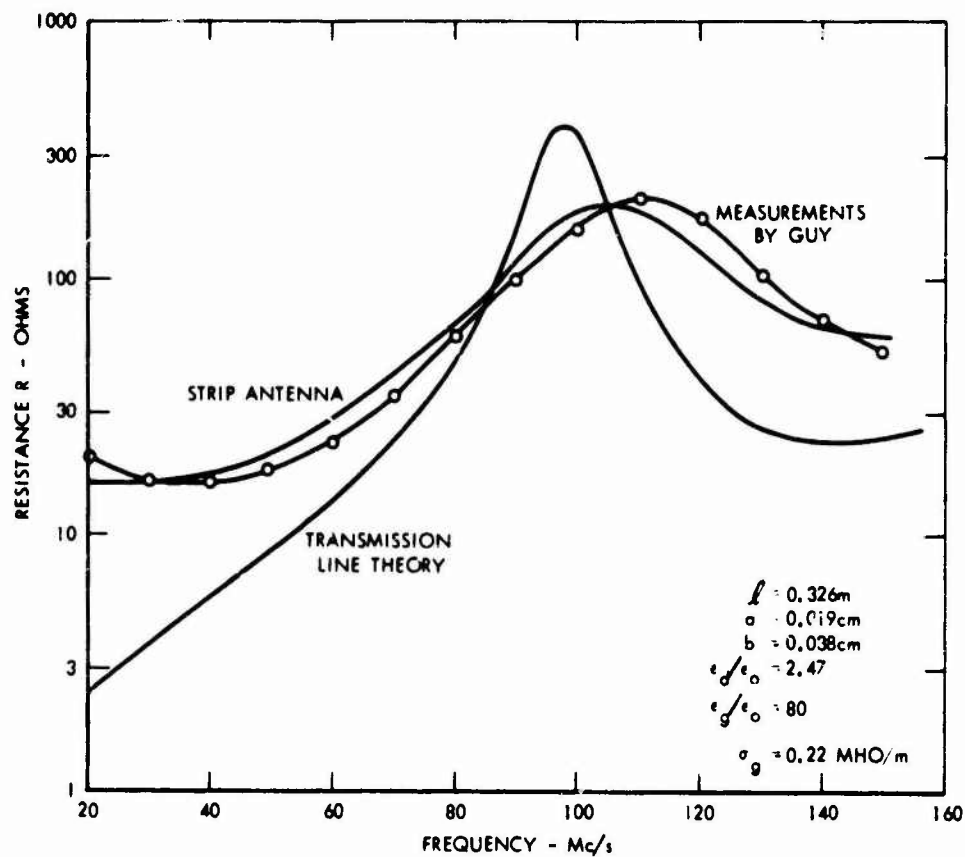


Figure 13. Impedance of an Insulated Antenna in a Dissipative Medium.
Antenna of Length l Above a Conducting Ground Plane.

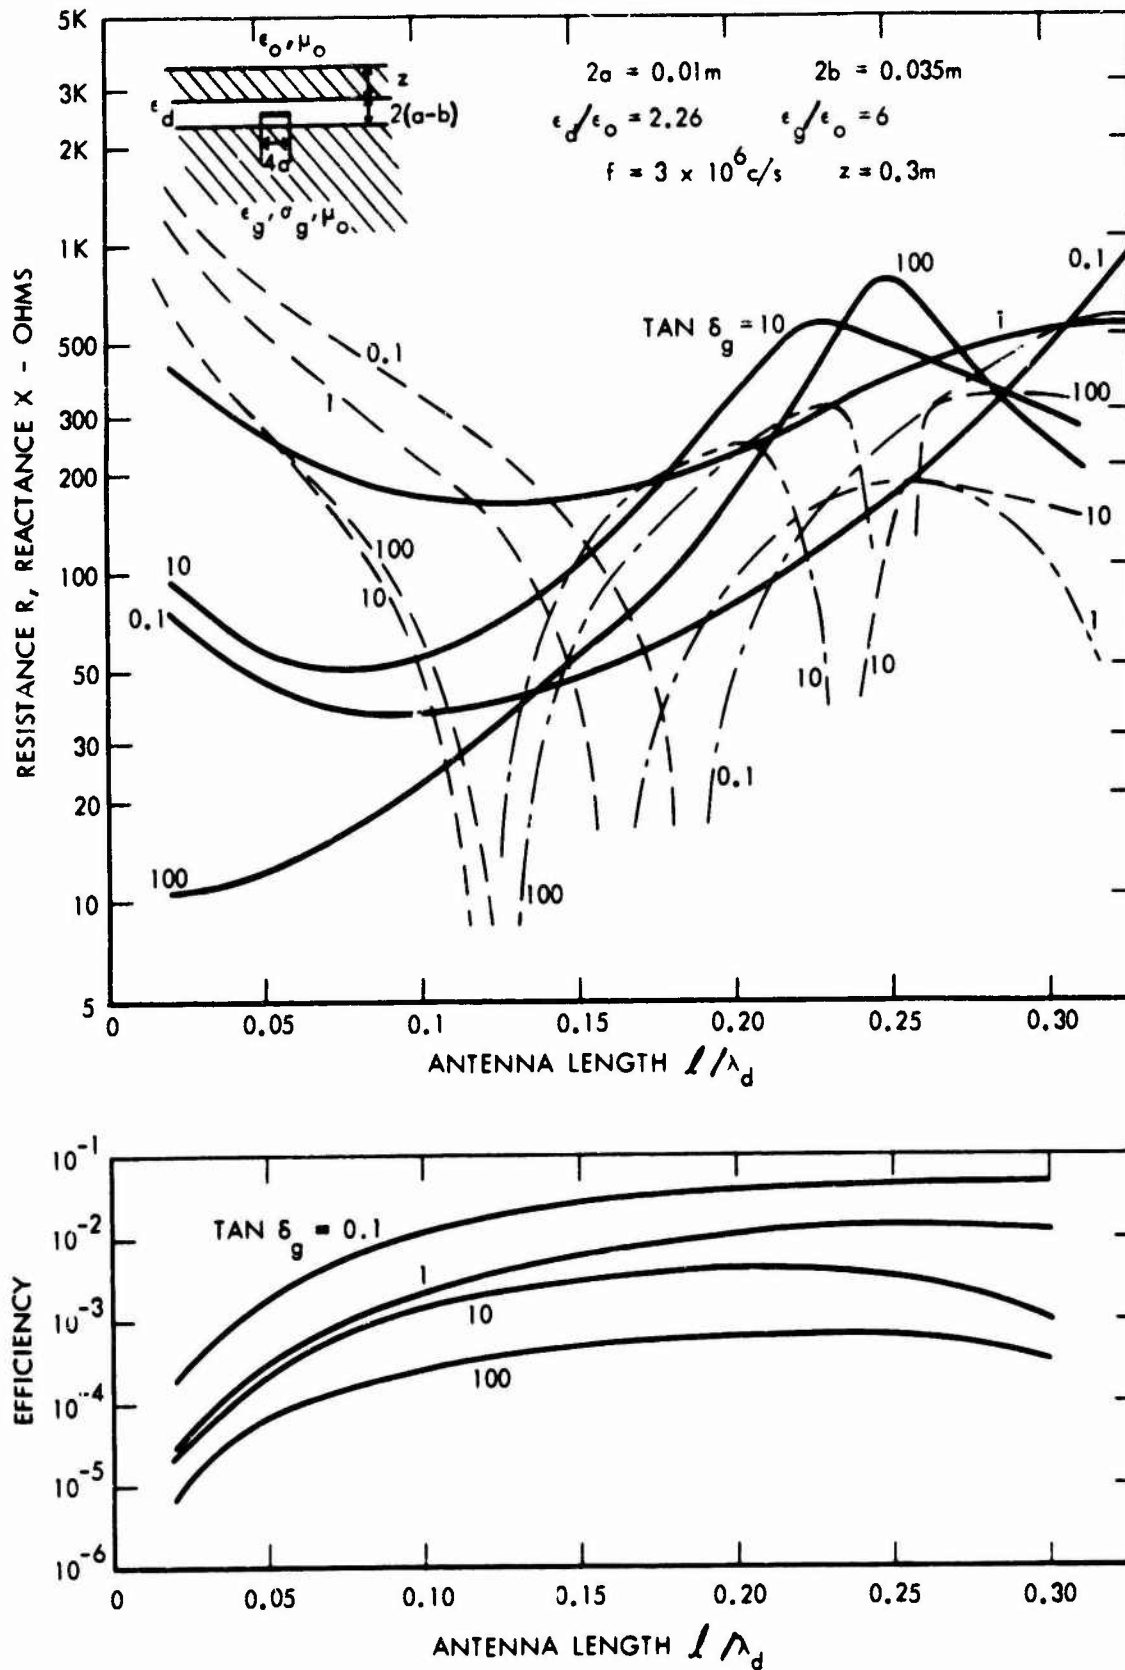


Figure 14. Impedance $Z = R + iX$ of a Buried Strip Antenna and its Radiation Efficiency.

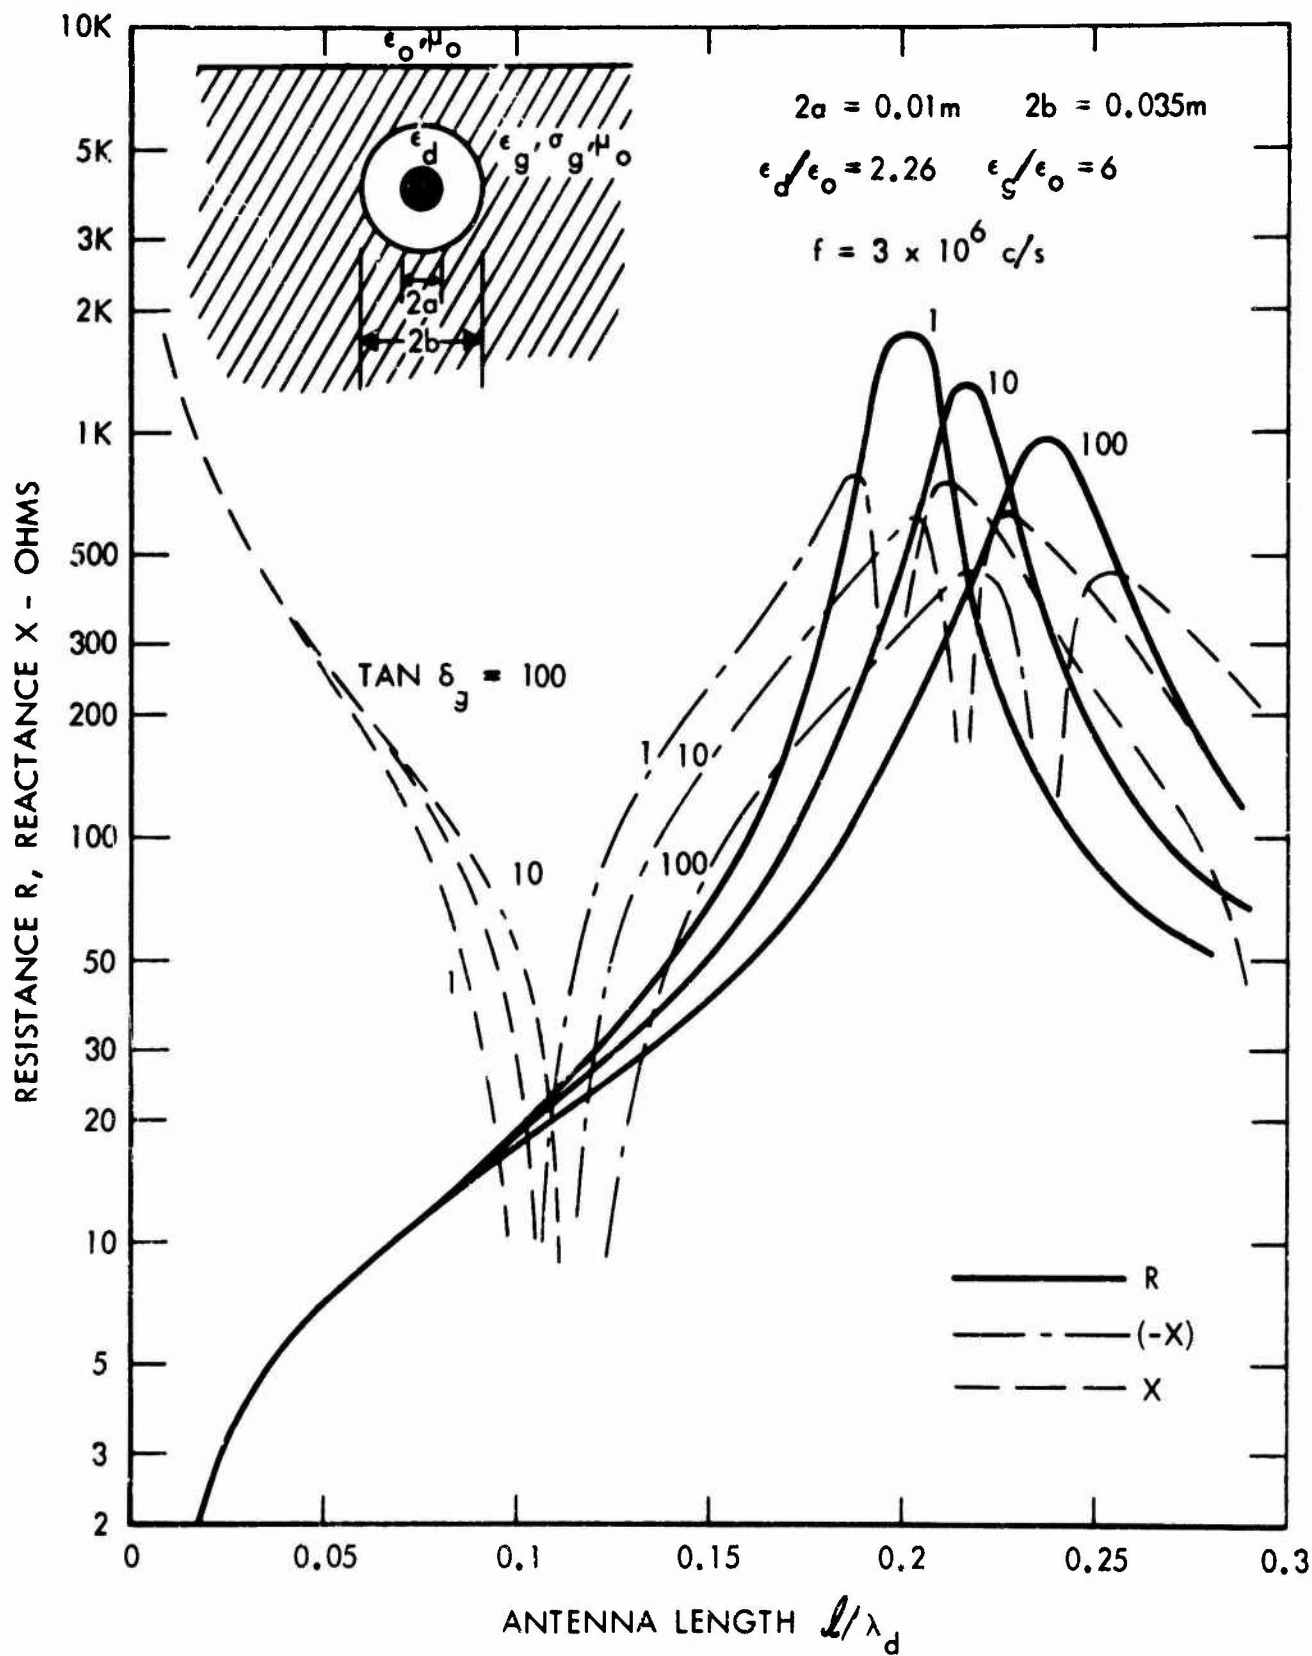


Figure 15. Impedance of a Buried Antennac $Z = R + iX$ Transmission Line Theory.

Unclassified
Security Classification

DOCUMENT CONTROL DATA - R&D		
(Security classification of title, body of abstract and indexing annotation must be entered when the overall report is classified)		
1. ORIGINATING ACTIVITY (Corporate author) APPLIED RESEARCH LAB. SYLVANIA ELECTRONIC SYSTEMS, A Division of Sylvania Electric Products Inc., 40 Sylvan Rd. Waltham, Massachusetts 02154		2a. REPORT SECURITY CLASSIFICATION Unclassified
3. REPORT TITLE Driving Point Impedance of Linear Antennas in the Presence of a Stratified Dielectric		2b. GROUP
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) Scientific Report No. 7. Review Paper		
5. AUTHOR(S) (Last name, first name, initial) Galejs, Janis Dr. (PI)		
6. REPORT DATE April, 1965	7a. TOTAL NO. OF PAGES 31	7b. NO. OF REFS 23
8a. CONTRACT OR GRANT NO. AF19(628)-2410	8a. ORIGINATOR'S REPORT NUMBER(S) RR No. 445 S-3040-7	
b. PROJECT NO. 4642, 02	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
c. TASK DOD element 62405304	AFCRL-65-372	
d. DOD subelement 674642		
10. AVAILABILITY/LIMITATION NOTICES Qualified requestors may obtain copies of this report from DDC. Other persons or organizations should apply to the Clearinghouse for Federal Scientific and Technical Information (CFSTI), Sills Building, 5285 Port Royal, Springfield, Va. 22151		
11. SUPPLEMENTARY NOTES None	12. SPONSORING MILITARY ACTIVITY Air Force Cambridge Research Lab. Office of Aerospace Research (CRD) USAF, Bedford, Massachusetts	
13. ABSTRACT A linear flat strip antenna lies between several dielectric layers in a direction parallel to the interfaces. Its impedance is formulated variationally as an infinite double integral. For thin half-wave antennas in a homogeneous medium the double integral is evaluated analytically and it gives standard impedance expres- sions. For antennas of finite width the integrals are evaluated numerically and for a homogeneous medium the impedance has been correlated with the theories of King and Middleton, Wu, with the impedance computed from a complementary slot antenna and with available measurements. The impedance is also computed for anten- nas in a dielectric layer, and the decrease of the radiation effi- ciency observed with increasing electrical thickness of the layer is explained with the increased amounts of surface wave power and in part by local dielectric losses. For insulated antennas locat- ed in a dissipative medium the theory presented here yields results		